

# EVIDENCE 3 ELEC

Efficiency of a modern convector with high-precision electronic thermostat

Thermor 

## CHARACTERISTICS

### COMFORT

- Fast heating thanks to efficient heat distribution on the appliance surface
- Sheathed heating element with an aluminium diffuser
- Class II and IP 24 protection with dual electric insulation for ultimate safety
- Anti-tilt system and automatic overheating safety device

### DESIGN

- High-end modern design
- Stamped front air outlet
- Colour: White (RAL 9016)

### USER-FRIENDLINESS

- 5-mode switch: Comfort, Eco, Anti-frost, Off, Programme
- Mode-setting cursor and control knob
- Easy to install: H-shaped vertical support
- Models with plug and standing kit\*\*


### SAVINGS

- Up to 15% energy savings\*
- High-precision electronic thermostat
- ErP-compliant

In order to be ErP-compliant/CE, Evidence 3 Elec (fix models) must be installed with a centralised weekly programming



ACTIVE HEAT CONVECTOR  
500 TO 2500 W




Models available\*\*\*



Energy savings



Heating element




Controls


\* Compared with a mechanical convector

\*\* Depending on models

\*\*\* Models available: 1. Vertical - 2. Horizontal - 3. Plinth.

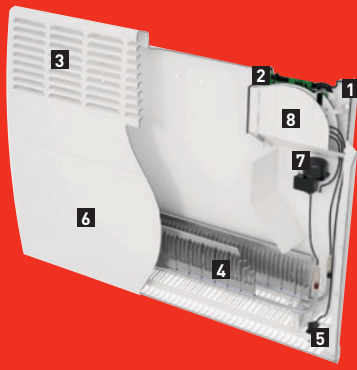


- 1** Control knob
- 2** Mode-setting cursor
- 3** Air outlet
- 4** Sheathed heating element with aluminium diffuser
- 5** Room temperature sensor
- 6** Front panel
- 7** Anti-tilt system
- 8** Overheating safety device



- 1** Temperature-setting knob
- 2** Mode setting cursor (Shutdown, Anti-frost, Programming, Comfort, Eco)
- 3** Heating light indicator

## INSTALLATION DIMENSIONS (in mm)

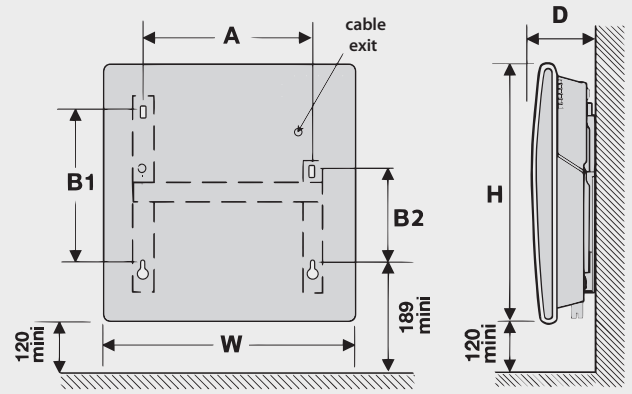

## TECHNICAL DATA

Output (W)	Dimensions (mm)						Net weight (kg)
	Width (W)	Height (H)	Depth (D)	A	B1	B2	
500	391	461	114	122	256	158	3.1
1000	465	461	114	196	256	158	3.5
1500	613	461	114	344	256	158	4.4
2000	761	461	114	492	256	158	5.3
2500	909	461	114	640	256	158	6.2

CE | Classe II | IP 24

