

# AIRLIS

Performance of a cost-effective heat pump water heater



## CHARACTERISTICS

### COMFORT

- Household-friendly noise level
- Comfort thanks to electric back-up (Steatite heating element)
- Recirculation connection to provide comfort on all points-of-use

### QUALITY - DURABILITY

- ACI hybrid anti-corrosive protection
- Steatite technology: Ceramic dry heating element
- New generation diamond-quality enamel (glass-lined inner tank)
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around flange


### USER-FRIENDLINESS

- Compact and easy to install
- Intuitive control panel
- Installation: Ambient air

### SAVINGS

- Up to 65% energy savings\*
- CFC-free high-density insulation for more energy savings
- High-efficiency water inlet

HEAT PUMP WATER HEATER  
200 TO 270 L  
(Floor-standing)



Models available\*\*

Up to  
**65%**  
ENERGY  
SAVINGS\*

Energy savings



Technology



Heating element



Energy efficiency  
class A+


\* Compared with an electric water heater

\*\*Models available: 1. Vertical wall-mounted - 2. Horizontal wall-mounted - 3. Floor-standing.



- 1** High-efficiency heat pump with wide temperature range of use
- 2** Intuitive control panel
- 3** Diamond-quality enamel
- 4** Enamelled sleeve and Steatite heating element
- 5** Air inlet/outlet
- 6** ACI hybrid anti-corrosive system with forced current and magnesium anode

## INSTALLATION DIMENSIONS (in mm)

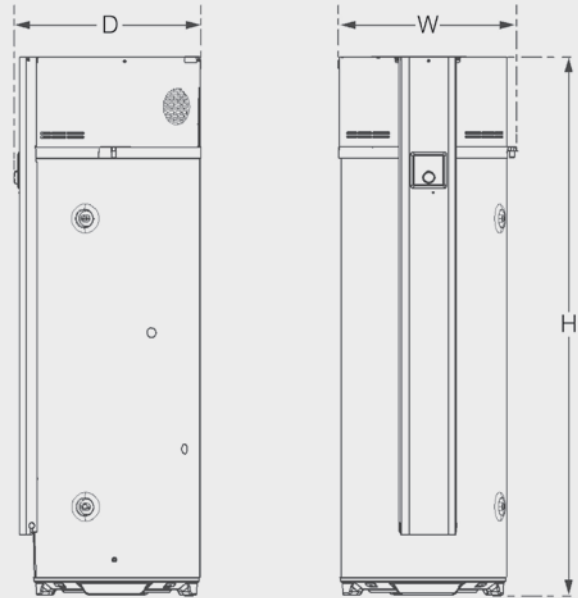

## INTUITIVE CONTROL PANEL



- 1** Eco mode: Advised to optimise energy savings without compromising on comfort
- 2** Absence mode: Generates energy savings when the user is not at home
- 3** Temperature control knob

## TECHNICAL DATA

Capacity (L)	Voltage (V)	Maximal total power consumed by the device (W)	Power consumed by electric heating (W)	COP at 15°C (ambient) <sup>(1)</sup>	V40 <sup>td</sup> (L) (W)	Heating time from 15 to 51°C (ambient installation 15°C air) (H)	Acoustic power (dB(A))	Refrigerant fluid
200	230 mono	2380	1800	2.95 (L)	310	7h38	57	R134a
270	230 mono	2980	2400	3.39 (XL)	353	10h33	57	R134a



<sup>(1)</sup> In the conditions of EN16147

Capacity (L)	Dimensions (mm)			Net weight (kg)	ERP Energy class	Profile
	Height (H)	Width (W)	Depth (D)			
200	1520	615	646	84	A+	L
270	1860	615	646	91	A+	XL

