

COMPACT HZ STEATITE

Premium electric water heater with exclusive Steatite technology for absolute safety and efficiency

Thermor 

CHARACTERISTICS

COMFORT

- LED water temperature display
- Heating and shower-ready light indicator
- Ergonomic frontal knob for easy temperature control
- Easy installation with wall-mounting plates
- Easy to maintain: Heating element removable without draining the tank

QUALITY - DURABILITY


- Steatite technology: Ceramic dry heating element adapted to hard or aggressive water
- Large size magnesium anode for strengthened tank protection
- Diamond-quality enamel
- Dielectric connection to avoid corrosion on hot water pipe
- Specific lip gasket to avoid corrosion around flange

USER-FRIENDLINESS

- 100% safety thanks to dry heating element with no direct contact with water
- IP 24 - full compliance with European standards for electrical safety and user protection
- ELCB anti-electric shock device
- Pressure relief valve
- Steam pressure regulation and safety thermostat to prevent overheating


SAVINGS

- Great energy savings thanks to anti scale build-up function of the Steatite heating element
- Eco position for more energy savings and increased lifetime
- Energy efficiency due to CFC-free high-density insulation foam
- Accurate mechanical thermostat and finest temperature adjustment
- High-efficiency water inlet

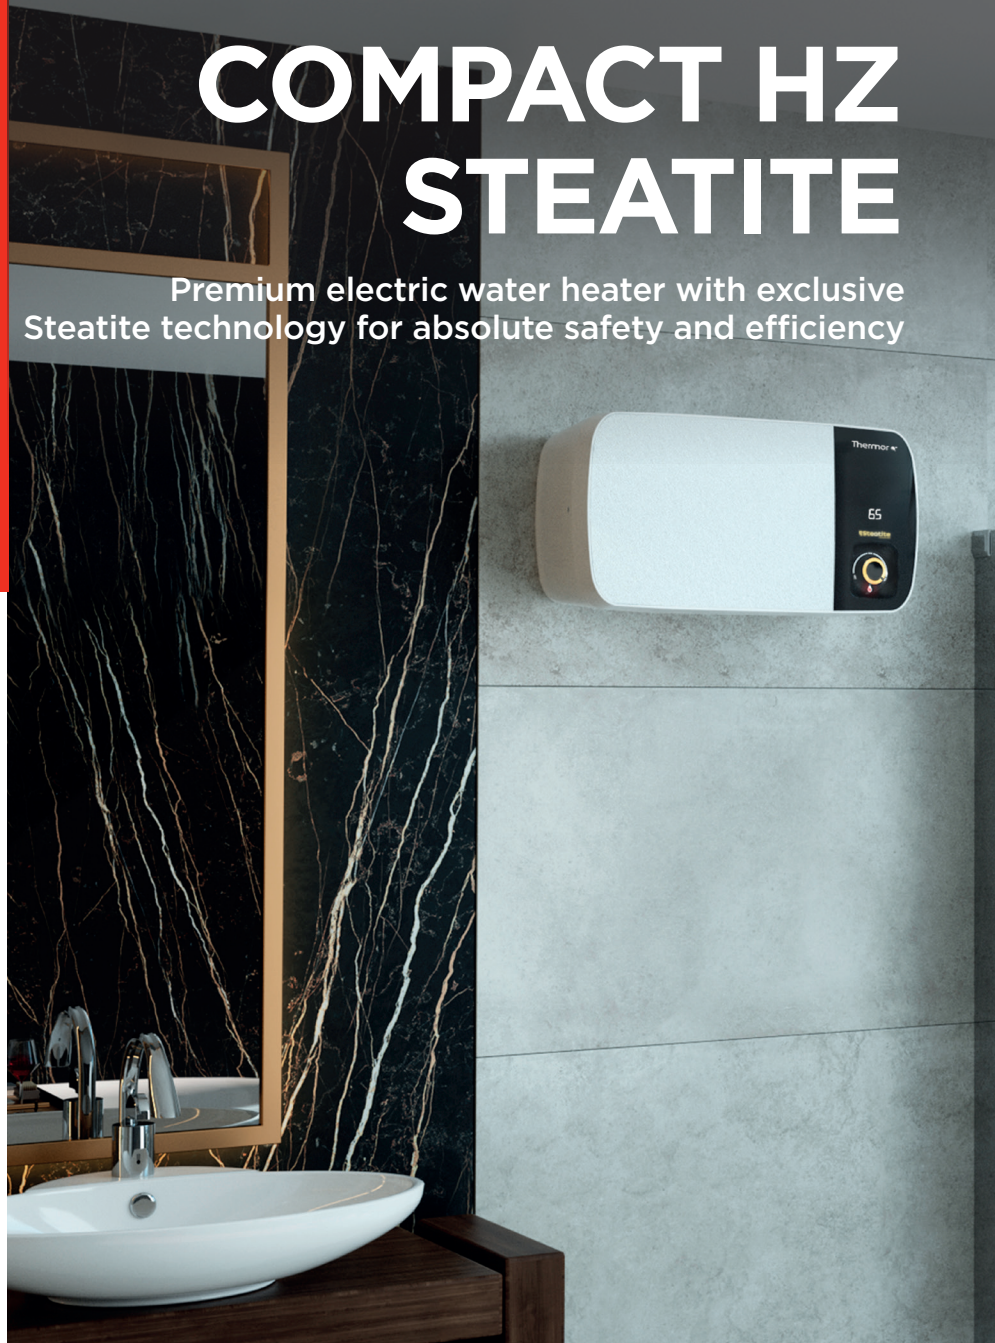

ELECTRIC WATER HEATER

20 TO 30 L
(Horizontal wall-mounted)



Models available*



Digital display

 **Steatite**
TECHNOLOGY


Technology



Energy savings


*Model types: 1. Vertical wall-mounted - 2. Horizontal wall-mounted - 3. Floor-standing.

www.thermor-heating.com

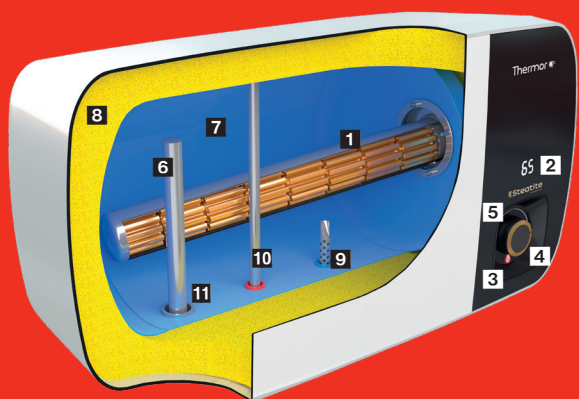

- 1 Ceramic dry heating element adapted to hard or aggressive water
- 2 LED water temperature display
- 3 Heating and shower-ready light indicator
- 4 Ergonomic frontal knob easy temperature control
- 5 Eco position for more energy savings and increased lifetime
- 6 Large size magnesium anode for strengthened tank protection
- 7 Diamond-quality enamel
- 8 High-density insulation foam for more energy savings
- 9 Inlet diffuser
- 10 Optimised stainless steel outlet pipe
- 11 Drainage port for easy maintenance

INSTALLATION DIMENSIONS (in mm)

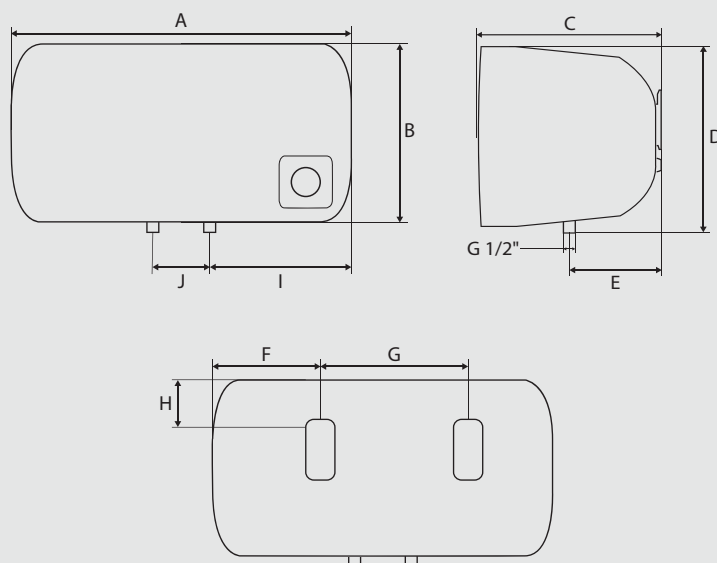

TECHNICAL DATA

Capacity (L)	Output (W)	Voltage (V)	Heat-up time* ($\Delta t=45^{\circ}\text{C}$) (min)	Energy consumption (kwh/24h at 65°C)
20	350	220-240	180	0.46
30	350	220-240	270	0.56

* Cold Water temperature = 25°C
 * Maximum temperature = $\pm 75^{\circ}\text{C}$

DIMENSIONS

Capacity (L)	Dimensions (mm)										Flange opening (mm)	Inlet / Outlet Connexions	Net weight (Kg)
	A	B	C	D	E	F	G	H	I	J			
20	600	320	315	335	160	190	260	90	250	100	78	1/2"	13.4
30	810	320	315	335	160	190	340	90	350	100	78	1/2"	16.6

IP 24

Atlantic International a simplified joint-stock company with €2 000 007 - 44 Boulevard des Etats-Unis 85000 LA ROCHE-SUR-YON, FRANCE - RCS La Roche-sur-Yon : 390 284 693 - L2R.fr - No contractual pictures - English - June 2020

Thermor