

RISTRETTO

Convenience of a round-shape classic point-of-use water heater with above & under sink configurations

Thermor 

CHARACTERISTICS

COMFORT

- Control knob on the bottom of the tank (Ristretto above sink), or on the top of the tank (Ristretto under sink)

QUALITY - DURABILITY


- Long tank lifetime thanks to O'Pro exclusive anti-corrosive system
- Magnesium anode for strengthened tank protection
- New generation diamond-quality enamel (glass-lined inner tank)
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around flange

USER-FRIENDLINESS

- IP 24 - full compliance with European standards for electrical safety and user protection (Ristretto above sink)
- IP 25 - full compliance with European standards for electrical safety and user protection (Ristretto under sink)
- Plug*
- Heating light indicator


SAVINGS

- Mechanical thermostat with integrated security
- High-efficiency water inlet
- CFC-free high-density insulation for more energy savings

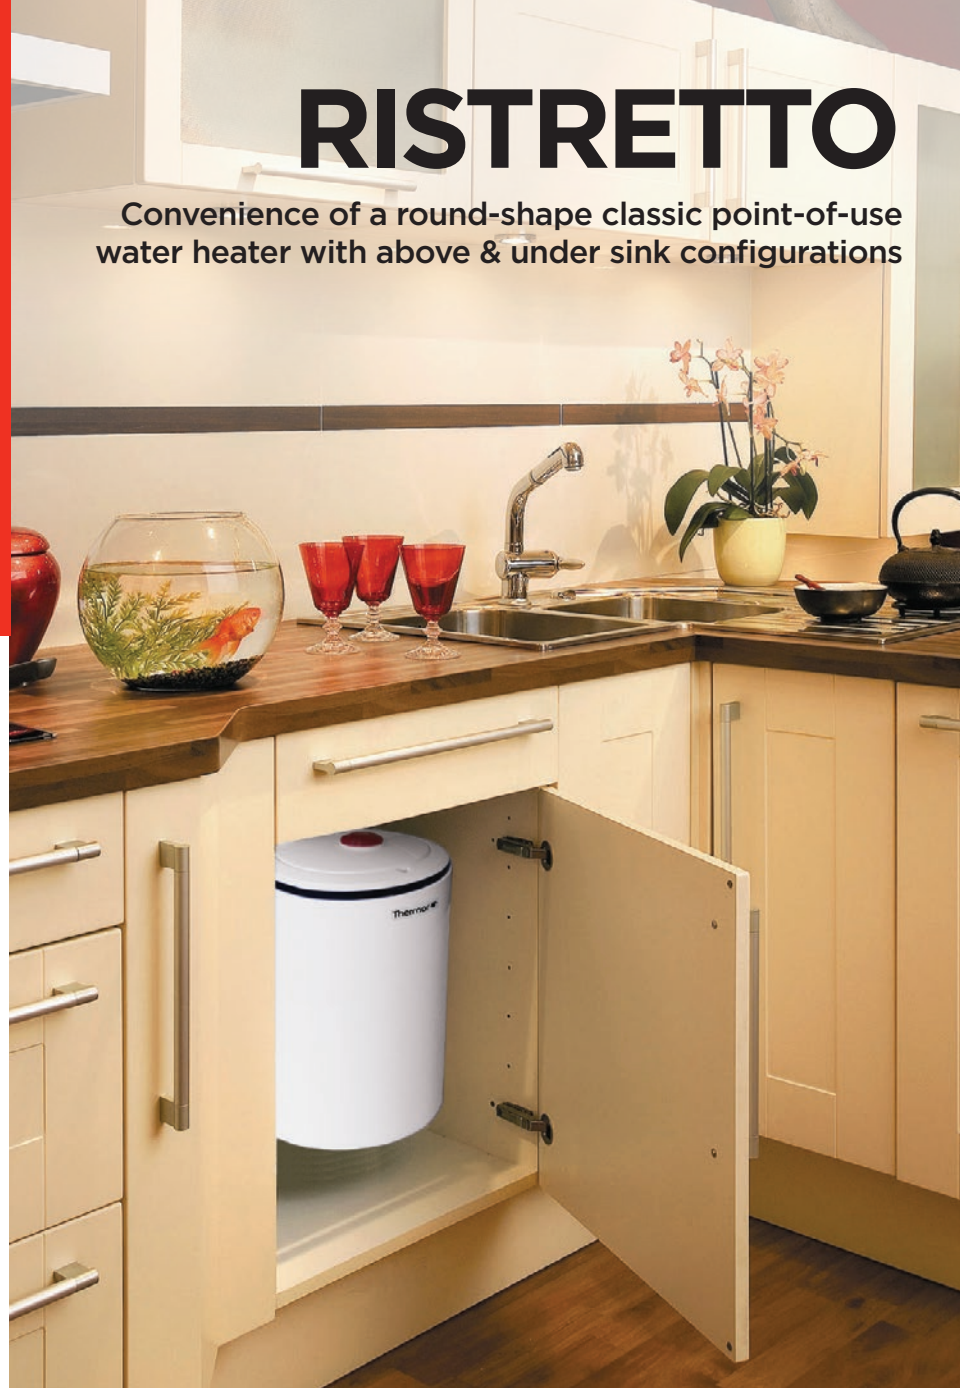

ELECTRIC WATER HEATER

10 TO 50 L
(Vertical wall-mounted)



Models available**




+50%

Tank lifetime



Technology




Heating element



Energy efficiency class A

*Depending on models.

**Model types: 1. Vertical wall-mounted - 2. Horizontal wall-mounted - 3. Floor-standing.

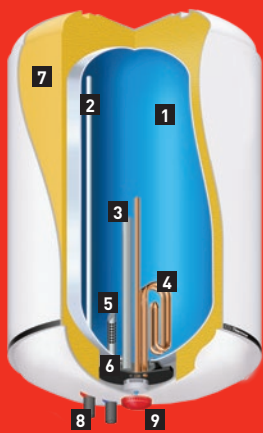

- 1 Diamond-quality enamel
- 2 Optimised stainless outlet pipe
- 3 Magnesium anode
- 4 Sheathed immersion heating element
- 5 Inlet diffuser
- 6 O'Pro anti-corrosive system
- 7 High-density polyurethane foam 0% CFC
- 8 Dielectric union
- 9 Bottom control knob

CONTROL KNOB




Ristretto above sink



Ristretto under sink

INSTALLATION DIMENSIONS (in mm)

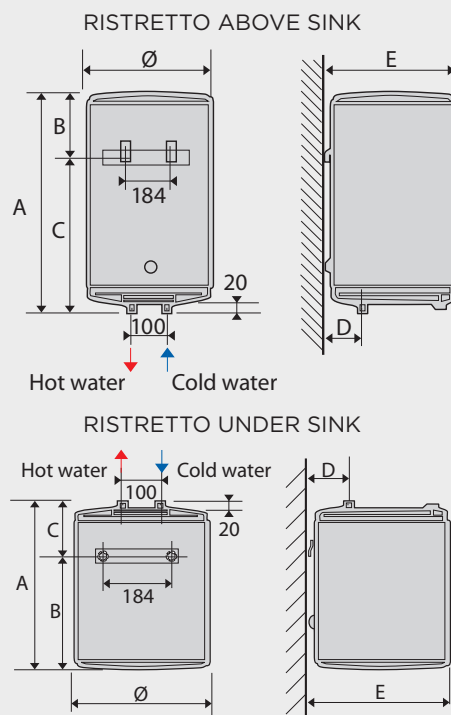

TECHNICAL DATA

Capacity (L)	Output (W)	Voltage (V)	Heat-up time at 60°C (Δt=20 °C) (in mm)	Heat-up time at 60°C (Δt=50 °C) (in mm)	Energy consumption (kwh/24h at 65°C)
10 above sink	1600	230 (220/240)	10	24	0.48
15 above sink	1600	230 (220/240)	14	35	0.58
10 under sink	2000	230 (220/240)	8	19	0.63
15 under sink	2000	230 (220/240)	11	28	0.66
30 above sink	2000	230 (220/240)	23	57	0.76
50 above sink	2000	230 (220/240)	38	96	1.13

DIMENSIONS

Capacity (L)	Dimensions (mm)						Flange opening (Ø mm)	Net weight (kg)	ERP Energy class	Profile
	Ø	A	B	C	D	E				
10 above sink	255	456	174	282	65	262	72	6.5	A	XXS
15 above sink	338	400	168	232	83	347	72	7.5	B	XXS
10 under sink	255	456	235	220	65	262	72	6.5	B	XXS
15 under sink	338	400	232	167	83	347	72	7.5	B	XXS
30 above sink	338	617	150	466	83	347	72	11.5	C	S
50 above sink	338	905	162	742	83	347	72	14.5	C	M

CE | EAC | IP 24 Under sink | IP 25 Above sink

