

O'Pro Classic 1200 W

EFFICIENT ENERGY-SAVING HEATER WITH REINFORCED TANK PROTECTION



+ PRODUCT

COMFORT

- Elegant design
- Control knob on the bottom of the tank
- Flat thermometer

QUALITY - DURABILITY

- Long tank lifetime thanks to O'Pro exclusive anti-corrosive system
- Magnesium anode for strengthened tank protection
- New generation diamond-quality enamel (glass-lined inner tank)
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around flange

USER-FRIENDLINESS

- IP 24 or 25 - full compliance with European standards for electrical safety and user protection
- Heating light indicator


SAVINGS

- Mechanical thermostat with integrated security
- High-efficiency water inlet
- CFC-free high-density insulation for more energy savings

ENERGY-SAVING WATER HEATER

50 TO 100 L
(HORIZONTAL WALL-MOUNTED)

50 TO 100 L
(VERTICAL WALL-MOUNTED)




Model available*

WARRANTY
5 YEARS

Warranty



Anti-corrosive
technology



Copper heating element



Gulf Technical Regulation
on Low Voltage Electrical
Equipment and Appliances


GCC energy regulation




علامة الجودة الإماراتية
Emirates Quality Mark

*Model types: A: Vertical wall-mounted / B: Horizontal wall-mounted / C: Floor-standing

O'Pro Classic 1200 W

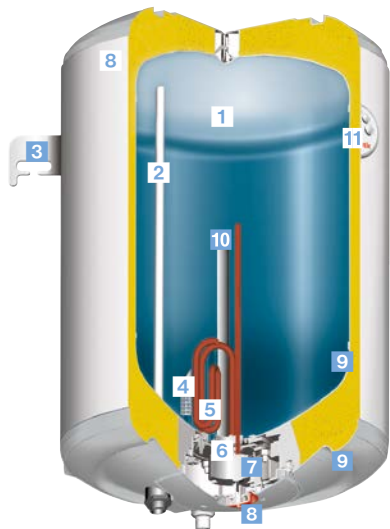


- 1 High-quality glasslined tank TiO + CuO
- 2 Optimised stainless steel outlet pipe
- 3 Hanging jig
- 4 Inlet diffuser
- 5 Sheathed immersion heating element
- 6 O'Pro System
- 7 Dielectric union
- 8 Thermostat
- 9 High-density insulation foam
- 10 Magnesium anode
- 11 External thermometer




O'Pro exclusive anti-corrosive system balances out the electrical potential of the tank and immersion heating element. Thus, the magnesium anode life is considerably increased and protection against corrosion is reinforced.

INSTALLATION DIMENSIONS

Horizontal wall-mounted

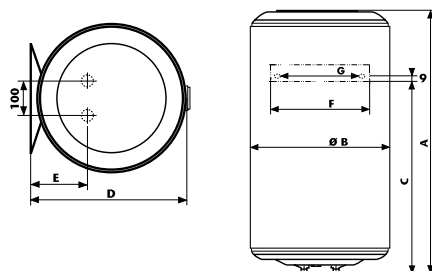

Vertical wall-mounted

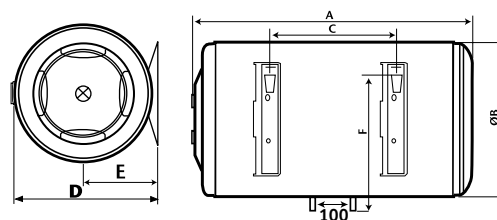

TECHNICAL DATA

CAPACITY (L)	OUTPUT (W)	VOLTAGE (V)	ENERGY CONSUMPTION (KWH/24H AT 65°C)	HEAT-UP TIME AT 60°C (ΔT=50°C)
O'Pro Classic 1200 W Vertical wall-mounted				
50	1200	230 (220/240)	0.866	2H21
80	1200	230 (220/240)	1.266	3h56
100	1200	230 (220/240)	1.555	4H45
O'Pro Classic 1200 W Horizontal wall-mounted				
50	1200	230 (220/240)	0.945	2H02
80	1200	230 (220/240)	1.215	3H18
100	1200	230 (220/240)	1.67	4H30

DIMENSIONS

CAPACITY (L)	DIMENSIONS (mm)							FLANGE OPENING (Ø) mm	NET WEIGHT (KG)	ESMA ENERGY EFFICIENCY
	A	B	C	D	E	F	G			
O'Pro Classic 1200 W Vertical wall-mounted										
50	612	433	380	451	165	300	240	72	16	★★★★★
80	859	433	590	451	165	300	240	72	20	★★★★★
100	1021	433	740	451	165	300	240	72	22	★★★★★
O'Pro Classic 1200 W Horizontal wall-mounted										
50	596	433	160	451	234	343	-	72	15	★★★★★
80	843	433	335	451	234	343	-	72	21	★★★★★
100	1005	433	510	451	234	343	-	72	24	★★★★

IP 24 - IP 25
Horizontal Vertical