

O'Pro Classic 800 W

HIGHLY EFFICIENT AND ENERGY-SAVING WATER HEATER



+ PRODUCT

COMFORT

- Elegant design
- Control knob on the bottom of the tank
- Flat thermometer

QUALITY - DURABILITY

- Long tank lifetime thanks to O'Pro exclusive anti-corrosive system
- Magnesium anode for strengthened tank protection
- New generation diamond-quality enamel (glass-lined inner tank)
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around flange

USER-FRIENDLINESS


- IP 24 or 25 - full compliance with European standards for electrical safety and user protection
- Heating light indicator

SAVINGS

- Mechanical thermostat with integrated security
- High-efficiency water inlet
- CFC-free high-density insulation for more energy savings

ENERGY-SAVING WATER HEATER

50 TO 100 L (HORIZONTAL WALL-MOUNTED)




Model available*

WARRANTY
5 YEARS

Warranty



Anti-corrosive
technology



Copper heating element



Gulf Technical Regulation
on Low Voltage Electrical
Equipment and Appliances


GCC energy regulation




علامة الجودة الإماراتية
Emirates Quality Mark

*Model types: A: Vertical wall-mounted / B: Horizontal wall-mounted / C: Floor-standing

O'Pro Classic 800 W

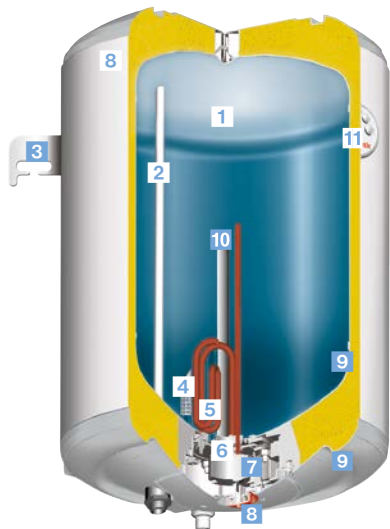


- 1 Diamond-quality enamel (glass-lined inner tank)
- 2 Optimised stainless steel outlet pipe
- 3 Hanging jig
- 4 Inlet diffuser
- 5 Sheathed immersion heating element
- 6 O'Pro anit-corrosive system
- 7 Dielectric union
- 8 Thermostat
- 9 High-density insulation foam
- 10 Magnesium anode
- 11 External thermometer




O'Pro exclusive anti-corrosive system balances out the electrical potential of the tank and immersion heating element. Thus, the magnesium anode life is considerably increased and protection against corrosion is reinforced.

INSTALLATION DIMENSIONS

Horizontal wall-mounted

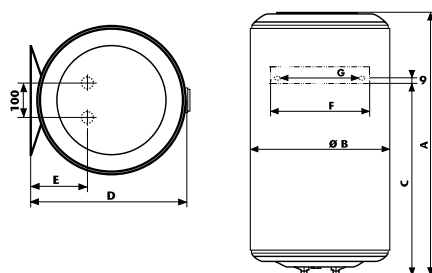

Vertical wall-mounted

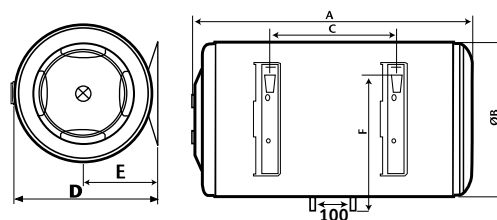

TECHNICAL DATA

CAPACITY (L)	OUTPUT (W)	VOLTAGE (V)	HEAT-UP TIME AT 60°C (ΔT=20°C)	HEAT-UP TIME AT 60°C (ΔT=50°C)	ENERGY CONSUMPTION (KWH/24H AT 65°C)
O'Pro Classic 800 W Horizontal wall-mounted					
50	800	230 (220/240)	1h15	2H30	1.27
80	800	230 (220/240)	2h04	4h08	1.51
100	800	230 (220/240)	2h45	5h30	1.67

DIMENSIONS

CAPACITY (L)	DIMENSIONS (mm)							FLANGE OPENING (Ø) mm	NET WEIGHT (Kg)	ESMA ENERGY EFFICIENCY
	A	B	C	D	E	F	G			
O'Pro Classic 800 W Horizontal wall-mounted										
50	596	433	160	451	234	343	-	72	16	★★★★★
80	843	433	335	451	234	343	-	72	20	★★★★★
100	1005	433	510	451	234	343	-	72	22	★★★★

IP 24