


# AEROMAX ACCESS

High performance, connected and cost-effective  
heat pump water heater

Thermor 



## COMFORT

- Low noise level (54 dB)
- Electric heating back-up
- Connectivity & remote control via Cozytouch application
- Coil version available in 250 L



## DURABILITY

- Diamond-quality enamel tank
- ACI Hybrid technology for greater lifetime product and less maintenance



## USER FRIENDLINESS

- Ergonomic digital interface with heating indicator, operating modes and smart functions
- Waterdrop led indicator



## ENERGY SAVINGS

- New R290 refrigerant with very low GWP
- Eco + self learning mode to provide the right amount of hot water when needed

[www.thermor.com](http://www.thermor.com)

## EASY PROGRAMMING WITH A NEW DIGITAL INTERFACE

### With Cozytouch App you can:

- Manage your water heater from everywhere
- Monitor your energy consumption
- Increase your hot water production immediately with Boost mode
- Switch off water heater when you are out

**Waterdrop LED Indicator :** level of hot water ready to use

**Absence mode :** Anti-frost position (20°C)

**Manual mode:** Selection of required hot water quantity

**Eco+ mode:** Automatic operation according to consumer's daily habits



## PROVEN QUALITY WITH ACI HYBRID TECHNOLOGY



- 1 Heat pump
- 2 Air inlet / outlet
- 3 Diamond-quality enamel
- 4 ACI Hybrid anti-corrosive protection
- 5 Sheathed stainless steel heating element
- 6 Electronic regulation for temperature control accuracy




### ACI HYBRID :

- ACI Hybrid technology guarantees you:
- Permanent protection of the tank in all types of water
  - Limited scalling and easy maintenance
  - Immediate, permanent protection thanks to an anti-corrosive system with forced current and magnesium-coated titanium anode

## TECHNICAL DATA

Specification	Aeromax Access		
	200	250	250 (with coil)
Tank capacity (L)	200	250	250 (with coil)
Electrical connection (V / Hz)	230/50		
Installation	Floor Standing		
Maximal total power consumed by the device (W)	2250		
Power consumed by electric heating (W)	1800		
Power consumed by heat pump (W)	450		
Water temperature range by heat pump (°C)	50 to 65		
Heat pump temperature range of use (°C)	8 to 33		
COP at 15 °C (ambient) <sup>(1)</sup>	2.4	2.66	2.5
COP at 20 °C (ambient) <sup>(1)</sup>	2.58	2.88	2.73
V40 ErP (L)	270.5	336.6	337.9
Heating time from 15 °C to 51 °C (ambient installation 15 °C air) (H)	3h42	4h34	4h35
Acoustic power (db(A))	54		
Refrigerant fluid	R290		
Net weight without coil (kg)	64	71	82
Coil surface (m <sup>2</sup> )	0,62		
ErP energy class	A		
Profile	L	XL	L
Connectivity	Cozytouch		

(1) Compliant with EN 16147 conditions.

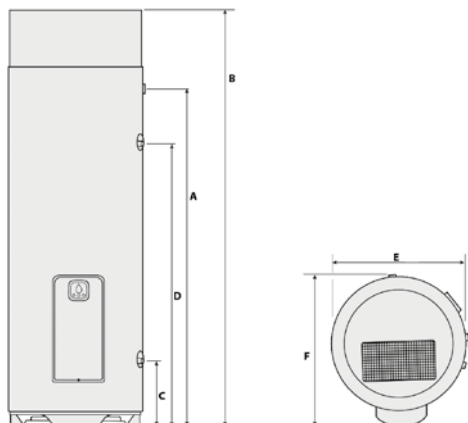

## DIMENSIONS TABLE

Model	Dimensions (mm)					
	A	B	C	D	E	F
200 L	1180	1529	277	959	575	636
250 L	1432	1782	277	1199	575	636
250 L (with coil)	1432	1782	277	1199	575	636

Thermor