

AEROMAX SWIMMING POOL 2

Simplicity and comfort with the new
reversible heat pump for swimming pools

Thermor 

CHARACTERISTICS

COMFORT

- Heat pump operating temperature range from +2°C to +35°C
- Household-friendly noise level
- 3 operating modes: Auto, Heating mode and Cooling mode
- Stable and comfortable temperature thanks to Auto mode with integrated control (cooling & heating)
- Suitable for swimming pools with basin volume of up to 90m³*

QUALITY - DURABILITY

- Prevention of algae proliferation
- Preservation of the swimming pool liner
- Titanium exchanger for improved durability and longer product life

USER-FRIENDLINESS

- Digital remote control with 10 meter cable and user-friendly display
- Auto-defrost by reversal cycle

SAVINGS

- COP up to 4.6
- Easy & precise temperature adjustments



HEAT PUMP
8 TO 14 kW



Models available**



Controls


* Depending on models

** Models available: 1. Vertical wall-mounted - 2. Horizontal wall-mounted - 3. Floor-standing.




- 1** Fan
- 2** Evaporator
- 3** Expansion valve
- 4** Compressor
- 5** Regulator


INSTALLATION DIMENSIONS (in mm)

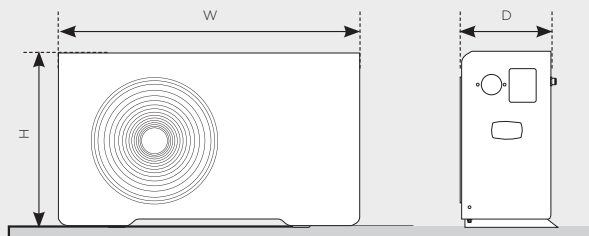

Installation dimensions for Aeromax Swimming pool 2 - 8 kW and 10 kW models (in mm)

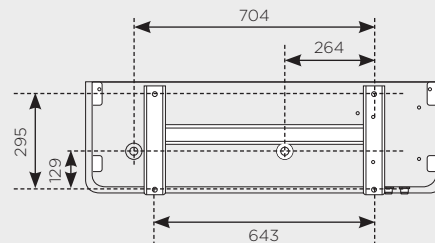

Installation dimensions for Aeromax Swimming pool 2 - 12 kW and 14 kW models (in mm)

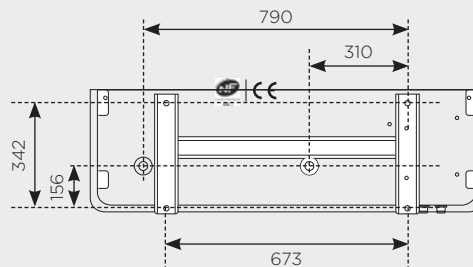

DIGITAL REMOTE CONTROL



- 1** High-visibility display (temperature, information...)
- 2** Active mode view (Auto, Heating or Cooling)
- 3** Water input temperature
- 4** Water output temperature
- 5** Start/Stop switch
- 6** Mode selection
- 7** Settings selection button
- 8** Programming mode setting

TECHNICAL DATA

Models	AEROMAX SWIMMING POOL 2 - 8 kW	AEROMAX SWIMMING POOL 2 - 10 kW	AEROMAX SWIMMING POOL 2 - 12 kW	AEROMAX SWIMMING POOL 2 - 14 kW
Coefficient of performance at 15°C ⁽¹⁾	4.6	4.4	4.6	4.5
Power output (kW)	7.6	10	11.3	13.6
Coefficient of performance at 24°C ⁽²⁾	5.5	5.3	5.5	5.4
Power output (kW)	9.5	12.5	14	17
Noise level at 1 m (dB(A))	54	55	56	
Dimensions W x D x H (mm)	1057 x 347 x 620	1057 x 347 x 620	1115 x 394 x 706	1115 x 394 x 706
Net weight (kg)	66	72	85	100

CE (1) Air +15°C/water +26°C. (2) Air +24°C/water +26°C.

