

# DURALIS

Durability of a premium water heater with ACI hybrid dynamic anti-corrosive protection

## CHARACTERISTICS

### COMFORT

- Continuous hot water availability
- Wide range of capacities

### QUALITY - DURABILITY

- ACI hybrid system for optimum protection of the tank
- Steatite technology: Ceramic dry heating element adapted to highly mineralised, hard or desalinated water
- New generation diamond-quality enamel (glass-lined inner tank)
- Dielectric union
- Specific lip gasket to avoid corrosion around flange

### USER-FRIENDLINESS

- IP 25 and IP 24 - full compliance with European standards for electrical safety and user protection
- Heating light indicator

### SAVINGS

- High-precision bulb thermostat with integrated security
- High-efficiency water inlet
- CFC-free high-density insulation for increased energy savings



### ELECTRIC WATER HEATER

**50 TO 200 L**


(Vertical wall-mounted)

**100 TO 200 L**

(Horizontal wall-mounted)

**150 TO 300 L**

(Floor-standing)



Models available\*



Energy efficiency class C




Heating element



Technology


\*Model types: 1. Vertical wall-mounted - 2. Horizontal wall-mounted - 3. Floor-standing.

# INSTALLATION DIMENSIONS (in mm)

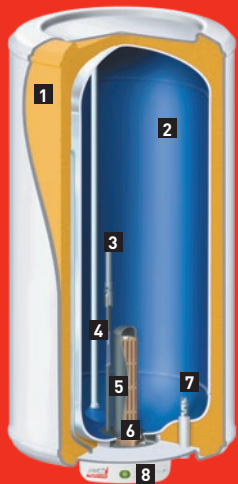


- 1** High-density polyurethane foam 0% CFC
- 2** Diamond-quality enamel
- 3** ACI hybrid anti-corrosive protection
- 4** Electronic sensor
- 5** Enamelled sleeve
- 6** Steatite dry heating element
- 7** Stainless steel water inlet
- 8** Heating light indicator


## VERTICAL WALL-MOUNTED

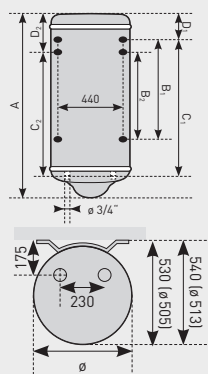

## HORIZONTAL WALL-MOUNTED

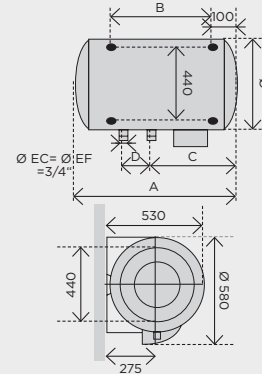

## FLOOR-STANDING

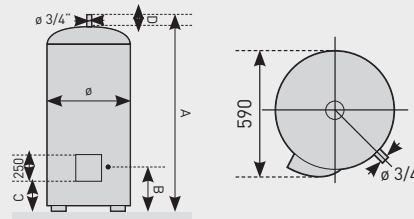

## TECHNICAL DATA

Capacity (L)	Output (W)	Energy consumption at 55°C (kWh/24)	Heating time	Hot water capacity at 40°C (V40) (L)
<b>Duralis (Vertical wall-mounted)</b>				
50	1200	0.82	2h36	-
75	1200	1.02	4h11	139
100	1200	1.25	5h19	187
150	1800	1.59	5h11	278
200	2400	1.94	5h17	375
<b>Duralis (Horizontal wall-mounted)</b>				
100	1800	1.21	3h07	184
150	1800	1.63	4h39	266
200	2100	1.98	5h13	354
<b>Duralis (Floor-standing)</b>				
150	1800	1.64	4h29	265
200	2400	1.95	4h34	375
300	3000	2.49	6h19	526

## DIMENSIONS

Capacity (L)	Dimensions (mm)											Net weight (kg)	ERP Energy class	Profile	
	Ø	A	B	B1	B2	C	C1	C2	D	D1	D2				
<b>Duralis (Vertical wall-mounted)</b>															
50	505	575	-	-	-	-	370	-	-	155	-	22	C	M	
75	505	780	-	-	-	-	570	-	-	120	-	27	C	M	
100	505	910	-	-	-	-	750	565	-	115	300	32	C	L	
150	505	1240	-	800	500	-	1050	750	-	145	445	41	C	M	
200	505	1570	-	800	700	-	1050	950	-	475	575	52	C	L	
<b>Duralis (Horizontal wall-mounted)</b>															
100	505	860	600	-	-	490	-	-	120	-	-	32	C	L	
150	505	1180	800	-	-	490	-	-	120	-	-	41	C	L	
200	505	1510	1050	-	-	490	-	-	120	-	-	50	C	L	
<b>Duralis (Floor-standing)</b>															
150	575	1015	270	-	-	160	-	-	30	-	-	40	C	M	
200	575	1275	270	-	-	160	-	-	30	-	-	51	C	M	
300	575	1780	270	-	-	160	-	-	30	-	-	73	C	L	

NF CE IP 24 IP 25

