

# ONIX CONNECT

Perfect integration of a space-saving flat water heater with Wi-Fi connectivity

Thermor 

## CHARACTERISTICS

### COMFORT

- Space-saving solution due to premium flat design (less than 30 cm depth)
- Multiposition installation: Can be both installed vertically and horizontally
- Boost mode\*: 1 shower in less than 30 minutes

### QUALITY - DURABILITY

- Double tank Steatite technology: Double ceramic dry heating element, adapted to aggressive, highly mineralised or desalinated water
- Magnesium anode for strengthened tank protection
- New generation diamond-quality enamel (glass-lined inner tank)
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid rust corrosion flange

### USER-FRIENDLINESS

- Intuitive digital interface with Shower-ready display
- Easy installation with wall-mounting plates and drilling template
- IP 24 - full compliance with European standards for electrical safety and user protection

### SAVINGS

- Eco+ mode: Automatic operation according to consumer's habits thanks to self-learning program
- Absence mode: Allows to create energy savings when away from home
- Accurate electronic thermostat for finest temperature control
- High-efficiency water inlet
- CFC-free high-density insulation for increased energy savings


### WI-FI CONNECTIVITY

- Remote piloting via the Cozytouch application (available on Google Play and Apple Store)
- Quick mode selection: Manual/Eco+/Boost/Absence mode
- Water & electricity consumption follow-up
- Hot water shortage alert
- Time remaining before next shower is ready



## ELECTRIC WATER HEATER

25 TO 80 L  
(Multiposition installation)



Models available\*\*



WHITE SILVER  
2 colours available



Digital interface



Heating element



Remote piloting




Energy efficiency class B

Available 1<sup>st</sup> quarter 2019

\*Not available for Onix Connect 30


\*\*Model types: 1. Vertical wall-mounted - 2. Horizontal wall-mounted - 3. Floor-standing - 4. Multiposition

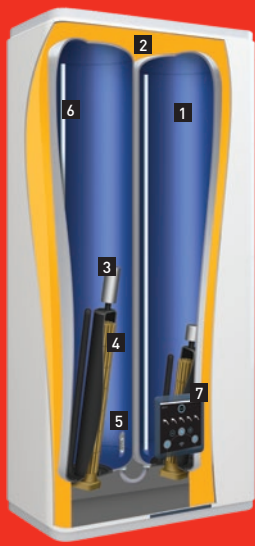


- 1 Diamond-quality enamel
- 2 High-density polyurethane foam 0% CFC
- 3 Magnesium anode
- 4 Double Steatite dry heating element
- 5 Inlet diffuser
- 6 Optimised stainless steel outlet pipe
- 7 Digital interface

## INSTALLATION DIMENSIONS (in mm)

### ONIX CONNECT 25 TO 80 L

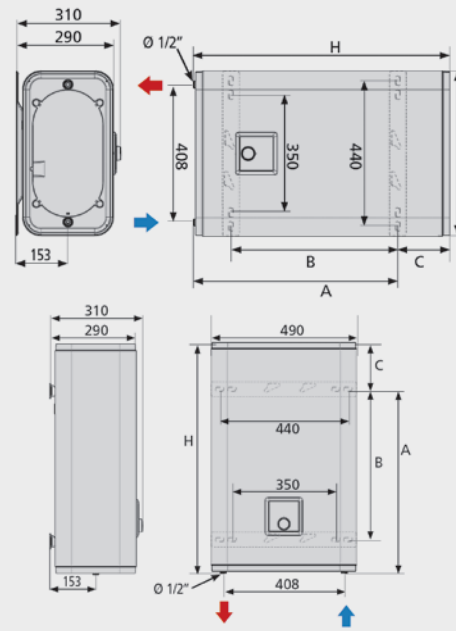

## INTUITIVE CONTROL PANEL

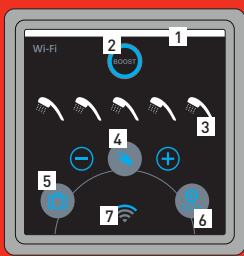

- 1 Power indicator
- 2 Boost mode\*: 1 shower in less than 30 minutes
- 3 Shower-ready display showing quantity of hot water remaining (fixed) or being produced (blinking)
- 4 Manual selection of required hot water quantity
- 5 Absence mode: Allows to create energy savings when away from home
- 6 Eco+ mode: Automatic operation according to consumer's habits thanks to a self-learning program
- 7 Light indicator when connected to Wi-Fi



**DOUBLE STEATITE**

Thanks to unique Steatite technology, the water heater is well adapted to aggressive, highly mineralised and desalinated water. The ceramic heating element is protected by enamelled steel sleeve, which grants a large heat exchange surface and reduces limescale deposits.

## TECHNICAL DATA

Model	Capacity (L)	Maximum power output (W)	Power output exit tank (W)	Power output entry tank (W)	Total heat-up time $\Delta t=50^\circ\text{C}$	Heat-up time exit tank (without boost)
30	25	1000	1000	1000	1h32	0h46
50	40	2250	1500 + 750	1000	2h02	0h49
80	65	2250	1500 + 750	1000	3h19	1h19
100	80	2250	1500 + 750	1000	4h04	1h38

## DIMENSIONS

Model	Dimensions (mm)						Net weight (kg)	ERP energy class	Profile
	Width (W)	Height (H)	Depth <sup>(1)</sup> (D)	A	B	C			
30	490	600	290	435	280	165	20.5	B	S
50	490	765	290	610	500	155	24.5	B	M
80	490	1090	290	975	700	115	32.5	B	M
100	490	1300	290	1185	800	115	37.5	B	M

CE | EAC | IP 24

(1) Without wall plate  
\*Not available for Onix Connect 30



**Thermor**