

# ONIX CONNECT


Perfect integration of a space-saving flat  
water heater with Wi-Fi connectivity

Thermor 



## DESIGN

- Premium flat design (only 29cm depth) with multi-position installation : vertical or horizontal.
- Colours : White & Silver



## COMFORT

- Fast heating thanks to double-tank structure.
- Boost mode generates maximum heating for extra water needs.



## ENERGY SAVINGS

- Eco+ and Absence modes.
- Energy consumption follow-up via the Cozytouch application.



## CONNECTIVITY

- Connect and control your water heater remotely with the Cozytouch application.



Cozytouch

[www.thermor.com](http://www.thermor.com)

## EASY PROGRAMMING WITH A NEW DIGITAL INTERFACE



Wi-Fi Connectivity and remote control via the Cozytouch application

**Waterdrop LED Indicator:** Level of hot water ready to use

**Absence mode:** Anti-frost position (7 °C)


**Manual mode:** Selection of required hot water quantity



**Boost:** Increase hot water production to meet unforeseen needs

**Eco+ mode:** Automatic operation according to consumer's daily habits

## PROVEN QUALITY WITH STEATITE TECHNOLOGY

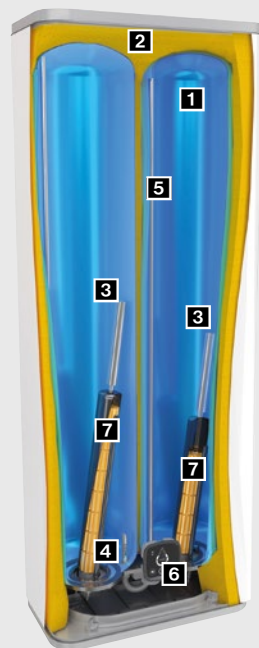


- 1 Diamond quality glass lining for long life and reliability
- 2 High-density, 0% CFC polyurethane foam
- 3 Magnesium anode x2 for protection against corrosion
- 4 Inlet diffuser
- 5 Optimised stainless steel outlet pipes
- 6 Electronic regulation for temperature control accuracy
- 7 Ceramic dry heating element with Steatite technology

**Steatite**  
x2 TECHNOLOGY

### DOUBLE DRY STEATITE HEATING ELEMENT

Adapted to aggressive, highly mineralised and desalinated water. Its protective enamel-coated steel sleeve makes maintenance easy, and there is no need ever to drain the tank to replace it.



## TECHNICAL DATA


Model	Number of users	Maximum power output: exit tank (W)	Power output: entry tank (W)	Voltage (V)	Total heat-up time $\Delta T=50^{\circ}\text{C}$	Heat-up time: exit tank	Energy consumption (kWh/24 h at $65^{\circ}\text{C}$ )	ErP energy class	Profile
30 <sup>(1)</sup>	1	1000	1000	220-240	1h27	0h44	0.28	B	S
50 <sup>(2)</sup>	2	2250	1000	220-240	1h46	0h33	0.69	B	M
80 <sup>(3)</sup>	3	2250	1000	220-240	2h52	0h53	1.01	B	M
100 <sup>(4)</sup>	4	2250	1000	220-240	3h32	1h05	1.11	B	M

## INSTALLATION DIMENSIONS

Model	Dimensions (mm)				Net weight (kg)
	H	A	B	C	
30 <sup>(1)</sup>	593	452	280	141	19.5
50 <sup>(2)</sup>	766	609	500	157	24.5
80 <sup>(3)</sup>	1090	973	700	117	32.5
100 <sup>(4)</sup>	1301	1184	800	117	37.5

(1) ErP capacity is 25 L (2) ErP capacity is 40 L (3) ErP capacity is 65 L (4) ErP capacity is 80 L

CE | IP 24

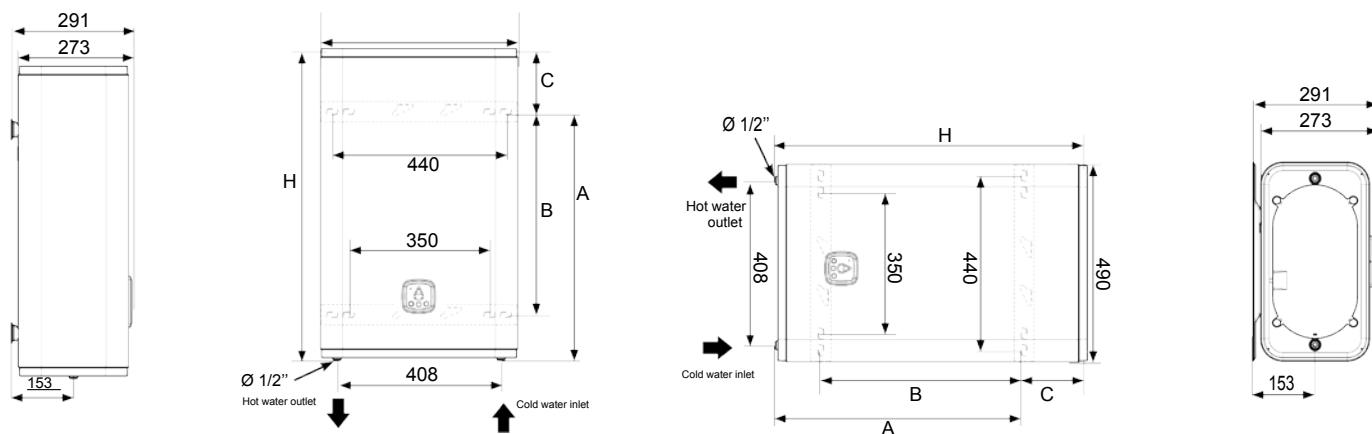

**Thermor**