

O'Pro Small & Slim



ELECTRIC WATER HEATER

Models 10 to 15

(Vertical wall-mounted above and under sink)

Model 30

(Slim vertical wall-mounted)



Comfort

- Dedicated solution for direct hot water availability



Durability

- Extended tank life thanks to O'Pro exclusive anti-corrosive protection
- Magnesium anode to bolster tank protection
- Diamond-quality glass lining
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around the flange



Installation

Installation options:

- 10 and 15L : above & under sink mounting models
- 30L : slim diameter (338mm) water heater with above sink configuration

Safe operation:

- IP 25 (above sink models) and IP 24 (under sink models) – full compliance with European standards for electric safety and user protection




Energy savings

- High-efficiency water inlet
- CFC-free high-density insulation for increased energy savings



User-friendly

- Control knob on the bottom (above sink models) or on the top (under sink models)
- Heating light indicator

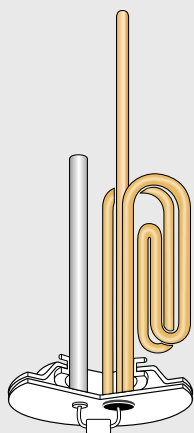

Video:



Exclusive anti-corrosive system

O'Pro technology uses an ohmic resistor to balance out the electric potential of both the tank and the heating element. This extends the life of the magnesium anode as well as bolstering protection against corrosion.


Technical specifications

Model	Ref.	Output (W)	Voltage (V)	Heat-up time at 60°C ($\Delta t=20^{\circ}\text{C}$) (min)	Heat-up time at 60°C ($\Delta t=50^{\circ}\text{C}$) (min)	Standby losses kWh/24 h at 65°C	Profile	ESMA energy efficiency
Above sink								
10	821406	1600	230 / 220-240*	10	24	0.50	XXS	★★★★★
15	821408	1600	230 / 220-240*	14	35	0.51	XXS	★★★★★
Under sink								
10	821407	2000	230 / 220-240*	8	19	0.67	XXS	★★★
15	821409	2000	230 / 220-240*	11	28	0.78	XXS	★★
Vertical wall-mounted								
30	831188	2000	230 / 220-240*	23	57	0.77	S	★★★★★


CE ENE IP 25 IP 24

Installation dimensions (mm)

Model	Ref.	Dimensions (mm)						Flange opening (Ø) mm	Net weight (kg)
		Ø	A	B	C	D	E		
Above sink									
10	821406	255	455	175	280	67	264	78	6.5
15	821408	338	400	172	228	84	348	78	7.5
Under sink									
10	821407	255	455	235	220	67	264	78	6.5
15	821409	338	400	232	168	84	348	78	7.5
Vertical wall-mounted									
30	831188	338	617	150	467	84	348	78	11.5



O'PRO SMALL UNDER
SINK

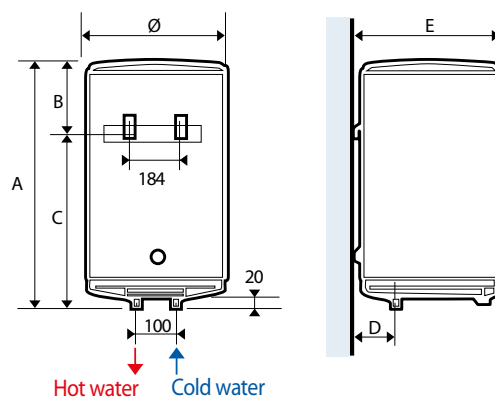

O'PRO SMALL ABOVE SINK & O'PRO SLIM

* Depending on models

atlantic