


O'PRO SLIM HZ

SAFE AND RELIABLE ELECTRIC WATER HEATER DESIGNED FOR NEW BUILD OR RENOVATION

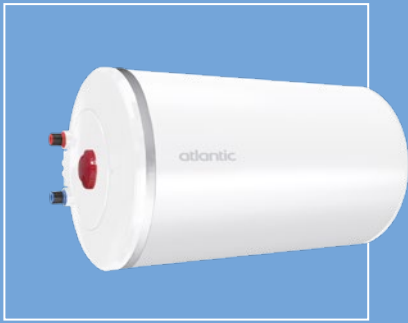

+ PRODUCT

DESIGNED FOR NEW BUILD

- Optimised horizontal and slim design for new build application
- Side water connections for easy installation in a suspended ceiling

QUALITY - DURABILITY

- +50% tank lifetime thanks to O'Pro unique anti-corrosive system
- Magnesium anode for strengthened tank protection
- Diamond-quality enamel
- Specific lip gasket to avoid corrosion around flange

SAVINGS

- Energy savings due to CFC-free high-density insulation foam
- High-efficiency water inlet

COMFORT


- Fast heating with 2000 W copper sheathed heating element
- Heating light indicator control knob
- More hot water thanks to bigger available capacities – up to 75 liters

SAFETY

- IP 24 – full compliance with European standards for electrical safety and user protection
- Pressure relief valve

ELECTRIC WATER HEATER

30 TO 75 L (WALL-MOUNTED)



Model available*



Horizontal and slim design



Side water connections



Copper sheathed heating element




O'Pro anti-corrosive system



Gulf Technical Regulation on Low Voltage Electrical Equipment and Appliances

*Model types: A: Vertical wall-mounted / B: Horizontal wall-mounted / C: Floor-standing

O'PRO SLIM HZ

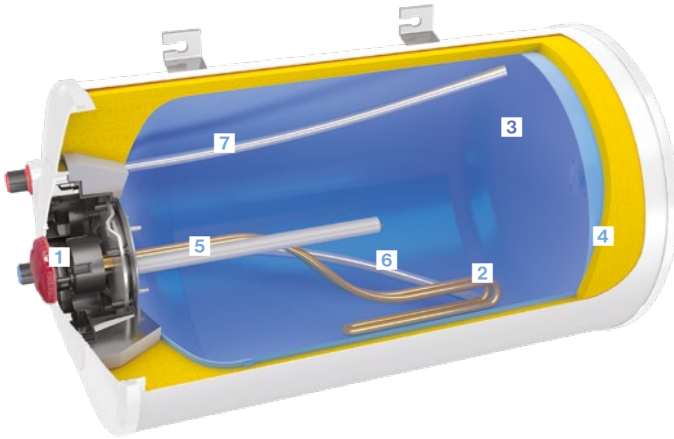

O'Pro
TECHNOLOGY



O'Pro exclusive anti-corrosive system balances out the electrical potential of the tank and immersion heating element. Thus, the magnesium anode life is considerably increased and protection against corrosion is reinforced.

- 1 Control knob
- 2 Sheathed immersion heating element
- 3 Diamond-quality enamel
- 4 High-density insulation foam for more energy savings
- 5 Magnesium anode for strengthened tank protection
- 6 Inlet diffuser
- 7 Optimised stainless steel outlet pipe

ENERGY CONSUMPTIONS

CAPACITY (L)	HEAT UP TIME (DT=50°C)	HEAT UP TIME (DT=20°C)	ENERGY CONSUMPTION (KWH/24H AT 65°C)	OUTPUT (W)	VOLTAGE	FREQUENCY
30	0h57	0h23	1,49	2000	220 V - 240 V	50-60 Hz
50	1h36	0h38	1,63	2000	220 V - 240 V	50-60 Hz
75	2h31	1h00	2,02	2000	220 V - 240 V	50-60 Hz

TECHNICAL DATA

CAPACITY (L)	INLET/OUTLET CONNEXIONS	DIMENSIONS (mm)					FLANGE OPENING (Ø) mm	NET WEIGHT (kg)	GROSS WEIGHT (kg)
		A	B	C	D	E			
30	1/2"	618	338	235	370	83	72	10,8	12,6
50	1/2"	906	338	435	370	83	72	14,8	17,5
75	1/2"	1203	338	700	370	83	72	18,9	22,7

INSTALLATION DIMENSIONS (mm)

