atlantic

FRENCH BRAND
SINCE 1968

CALYPSO Access

HEAT PUMP WATER HEATER

Models 85 to 150
(Vertical wall-mounted)



• FRENCH BRAND • RECOMMENDED BY PROFESSIONALS • CONNECTED SOLUTIONS

Calypso Access

An eco-friendly and economical heat pump water heater.

EASY PROGRAMMING WITH DIGITAL CONTROL PANEL

1 Heat pump indicator

2 Electric back-up indicator

3 Error indicator

4 Boost mode : Pressing “Boost” rapidly heats water up to 65°C.

5 Setpoint temperature change button (manual mode only)


6 Water temperature display

7 Mode switch button

8 Absence mode : Keeps water above 15°C during your absence

9 Eco +: Automatic adaptation of the setpoint temperature according to customer needs

10 Manual mode indicator

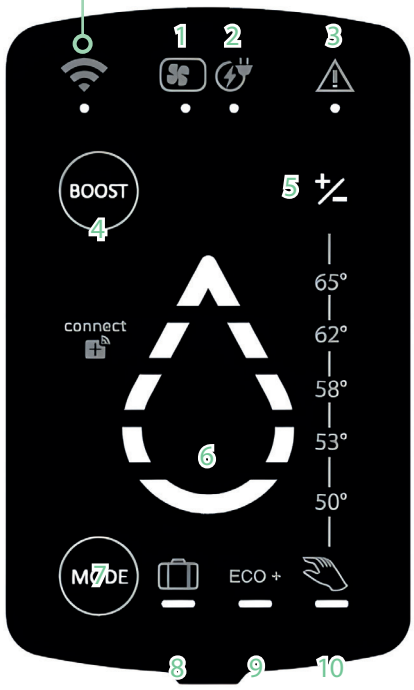

WI-FI CONNECTIVITY & REMOTE CONTROL

With Cozytouch App you can:

- Manage your water heater from everywhere
- Monitor your energy consumption
- Tailor your home comfort to your needs
- Switch off water heater when you are out

Download the APP for free

Download on the App Store

GET IT ON Google Play



Comfort

- Display and adjustment of the amount ofhot water available
- Boost mode to increase hot water production for extra needs (via the Cozytouch app)
- Remarkably silent model up to 42dB(A)
- Automatic antibacterial feature

Energy savings

- Eco+ mode to optimize hot water delivery based on consumer habits and needs
- Absence mode for energy savings while away from home
- High efficiency with a COP above 3 at 20°C
- Compatible with photovoltaic
- Water and electricity monitoring via the Cozytouch application
- GWP = 0.02
- Eco-responsible with R290 refrigerant

Durability

- Electric back-up with high exchange surface reduces scale

Installation and maintenance

- Heat pump designed for easy access and simplified maintenance
- Suitable for all housing configurations
- Multiple grip handles to facilitate handling of the product
- Air temperature range: +7 to 43 °C
- Can be tilled down on one side for easy transportation

User friendly

- Ergonomic digital interface with heating indicator and operating modes



Calypso Access

Technical specifications

Models	Actual capacity	Frequency (HZ)	Voltage (V)	Maximum total power consumed by the device (W)	Air temperature range	COP at 20°C ducted	Acoustic power (dB(A))	Refrigerant fluid	ErP Class
85	89.4	50	220-240	1500 (300 HP+1200 electic backup)	7 °C to 43 °C	3.10	42	R290	A+
120	125.4	50	220-240	1500 (300 HP+1200 electic backup)	7 °C to 43 °C	3.14	42	R290	A+
150	154.6	50	220-240	1500 (300 HP+1200 electric backup)	7 °C to 43 °C	3.71	42	R290	A+

Installation dimensions

Models	Ref.	Dimensions (mm)				Profile	Net weight (kg)
		H	W	W (with drain section)	D		
85	851462	1085	513	540	585	M	44
120	861441	1320	513	540	585	M	49
150	874055	1505	513	540	585	L	53

