

Zeneo

Wide range of highly efficient water heaters, equipped with ACI hybrid dynamic anti-corrosive protection



ELECTRIC WATER HEATER

STANDARD MODELS : 50 TO 200
(Vertical wall-mounted)

COMPACT MODELS : 100 TO 200
(Vertical wall-mounted)

MODELS : 150 TO 300 (Floor-standing)

MODELS : 100 TO 200 (Horizontal wall-mounted)



+ COMFORT

- Precise, constant and reliable heating temperature thanks to the electronic regulation

+ DURABILITY

- ACI hybrid technology: Dynamic anti-corrosive protection
- Steatite technology: Ceramic dry heating element protected by a sleeve for limited scaling and easy maintenance
- New electronic card: continuous protection of the 10mA tank
- Diamond-quality glass lining
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around the flange

+ INSTALLATION

- Vertical wall-mounted, horizontal wall-mounted & floor-standing versions to match all interior installation requirements
- Fully detachable next-generation screw-fixed hood
- Top and bottom handles for better grip

Safe operation:

- IP 25 - full compliance with European standards for electrical safety and user protection

+ ENERGY SAVINGS


- Accurate temperature control thanks to electronic thermostat
- High-efficiency water inlet
- CFC-free high-density insulation for greater energy savings

+ USER-FRIENDLINESS

- Heating light indicator
- Light-up display on the hood for easy reading



- 1 High-density, 0% CFC polyurethane
- 2 **DIAMOND-QUALITY GLASS LINING** for long life and reliability
- 3 **ACI HYBRID ANTI-CORROSIVE SYSTEM**
- 4 Optimised stainless steel
- 5 Enamel-coated sleeve
- 6 **STEATITE DRY HEATING ELEMENT**
- 7 Stainless steel water inlet
- 8 Electronic thermostat

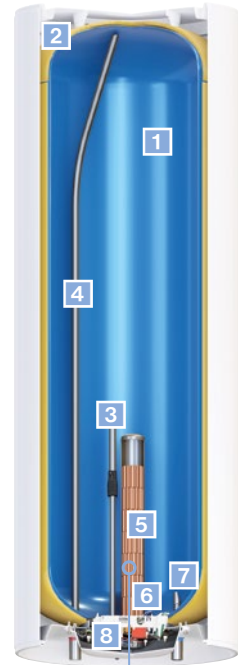

ACi
hybrid

Patented ACI hybrid technology guarantees you:


- + Permanent protection of the tank in all types of water
- + Limited scaling and easy maintenance
- + Immediate, permanent protection thanks to the combination of a continuous current generated by the titanium anode and the magnesium

Zeneo

Wide range of highly efficient water heaters, equipped with ACI hybrid dynamic anti-corrosive protection



Rotating dielectric union included

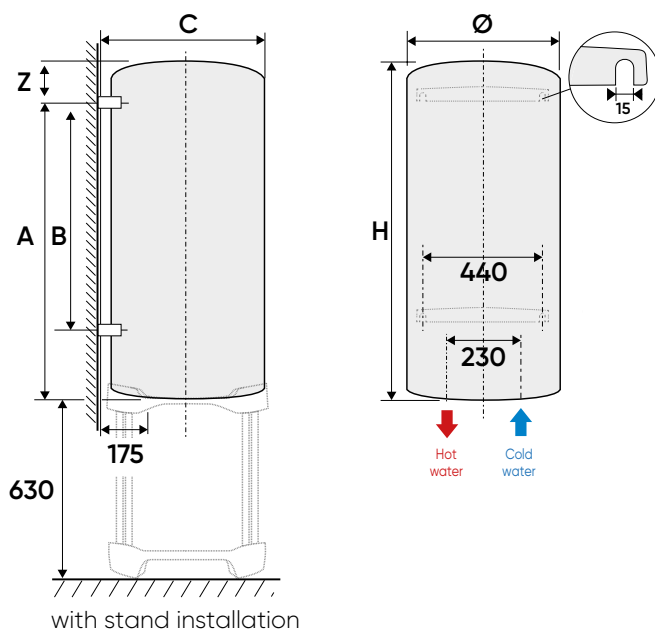

with stand installation



Technical data and installation dimensions


Model	Output (W)	Voltage (V)	Heating time	Hot water capacity at 40°C	Cooling constant	Energy consumption kWh/24 h	Dimensions (mm)						Net weight (kg)	ErP energy class	Profile	
							Ø	H	A	B	Z	C				
Zeneo Standard Vertical wall-mounted																
50	1200	230 V single phase	2h23	-	0.35	0.82	505	575	370	-	172	530	23	C	M	
75	1200	230-240 V single phase	4h08	142 L	0.28	1.08	513	705	570	-	135	540	23	C	M	
100	1200	230-240 V single phase	5h27	177 L	0.27	1.28	513	835	750	-	85	540	27	C	L	
150	1800	230 V single phase kit for 400 V 3-phase	5h14	277 L	0.23	1.65	513	1155	1050	800	105	540	35	C	M	
200	2200		5h44	374 L	0.20	1.94	513	1475	1050	800	425	540	45	C	L	
Zeneo Vertical wall-mounted turbo range																
50	1800	230 V single phase kit for 400 V 3-phase	1h27	-	0.35	0.82	505	575	370	-	172	530	23	C	M	
75	3000		1h37	132 l	0.31	1.11	513	705	570	-	135	540	23	C	M	
100	3000		2h20	184 L	0.28	1.34	513	835	750	-	85	540	27	C	L	
150	3000		3h20	269 L	0.22	1.56	513	1155	1050	800	105	540	35	C	M	
200	3000		4h46	363 L	0.20	1.87	513	1475	1050	800	425	540	45	C	L	

Technical data and installation dimensions

Model	Output (W)	Voltage (V)	Heating time	Hot water capacity at 40°C	Cooling constant
Zeneo Compact vertical wall-mounted (Ø 570 mm)					
100	1200	230 V single phase kit for 400 V 3-phase	5h18	182 L	0.24
150	1800	230 V single phase kit for 400 V 3-phase	5h18	277 L	0.20
200	2200	230 V single phase kit for 400 V 3-phase	5h36	368 L	0.20

Energy consumption kWh/24 h	Dimensions (mm)						Net weight (kg)	ErP energy class	Profile
	Ø	H	A	B	Z	C			
Zeneo Compact vertical wall-mounted (Ø 570 mm)									
1.15	570	740	570	-	165	585	30	C	L
1.43	570	990	750	500	235	585	39	C	M
1.88	570	1245	1050	800	190	585	49	C	L

IP 25



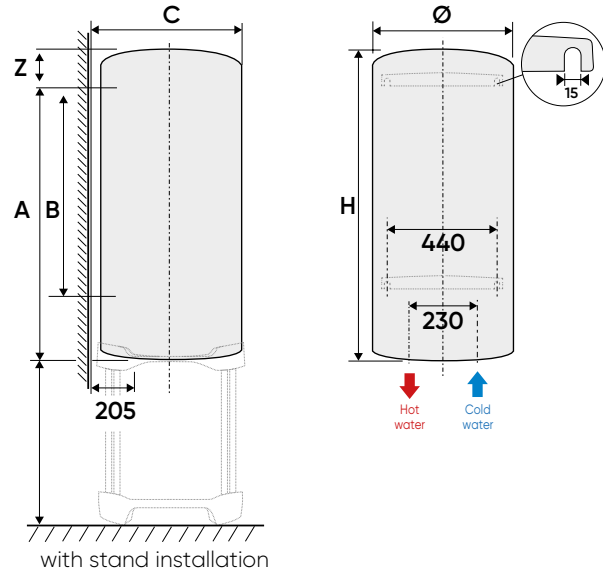


Technical data and installation dimensions

Model	Output (W)	Voltage (V)	Heating time	Hot water capacity at 40°C	Cooling constant
Zeneo Floor-standing					
150	1800	230 V single phase kit for 400 V 3-phase	4h39	263 L	0.23
200	2200		5h10	354 L	0.20
250	3000		5h25	465 L	0.19
300	3000		6h04	530 L	0.18

Energy consumption kWh/24 h	Dimensions (mm)				Net weight (kg)	ErP energy class	Profile
	Ø	H	A	C			
Zeneo Floor-standing							
1.65	575	1015	280	645	45	C	M
1.88	575	1270	280	645	50	C	M
2.22	575	1510	280	645	57	C	L
2.49	575	1765	280	645	64	C	L

IP 25

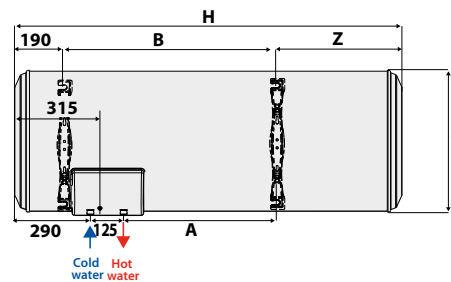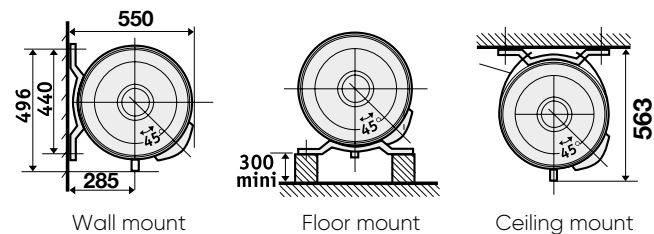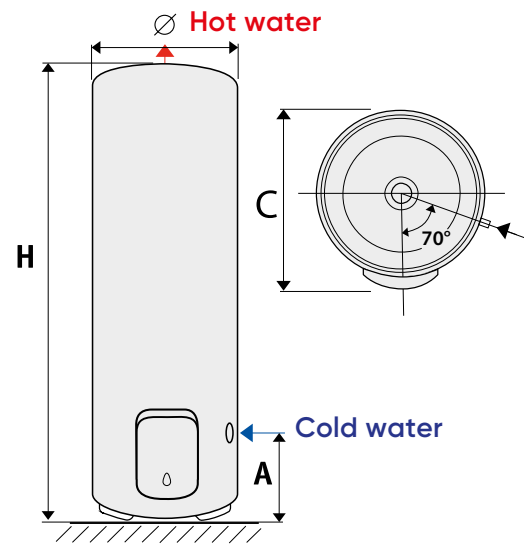

Technical data and installation dimensions

Model	Output (W)	Voltage (V)	Heating time	Hot water capacity at 40°C	Cooling constant	Energy consumption kWh/24 h	Dimensions (mm)						Net weight (kg)	ErP energy class	Profile
							Ø	H	A	B	Z	C			
Zeneo Horizontal wall-mounted															
100	1200	230 V single phase kit	5h37	192 L	0.32	1.52	530	840	275	500	150	-	32	C	L
150	1800	230 V single phase kit for 400 V 3-phase	5h15	277 L	0.25	1.75	530	1140	575	800	150	-	39	C	L
200	2200	230 V single phase kit for 400 V 3-phase	5h40	371 L	0.22	2.07	530	1460	575	800	470	-	49	C	L

IP 25