

Zeneo



ELECTRIC WATER HEATER

Standard models: 50 to 200

(Vertical wall-mounted)

Compact models: 100 to 200

(Vertical wall-mounted)

Models: 150 to 300

(Floor-standing)

Models: 100 to 200

(Horizontal all-mounted)



Comfort

- Accurate, constant and reliable heating temperature using electronic regulation



Durability

- ACI hybrid technology: dynamic anti-corrosive protection
- Steatite technology: ceramic dry heating element protected by a sleeve for limited scaling and easy maintenance
- New electronic card: continuous protection of the tank
- Diamond-quality glass lining
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around the flange



Installation

- Vertical wall-mounted, horizontal wall-mounted and floor-standing versions to match all interior installation requirements
- Fully detachable next-generation screw-fixed hood
- Top and bottom handles for better grip

Safe operation:

- IP 25 - full compliance with European standards for electrical safety and user protection



Energy savings

- Accurate temperature controls via electronic thermostat
- High-efficiency water inlet
- CFC-free high-density insulation to increase energy saving




User-friendly

- Heating light indicator
- Hood light-up display for easy reading




- 1 **DIAMOND-QUALITY GLASS LINING** for extended life and increased reliability
- 2 **HIGH-DENSITY, 0% CFC POLYURETHANE**
- 3 **ACI HYBRID ANTI-CORROSIVE SYSTEM**
- 4 Optimised stainless steel
- 5 Enamel-coated sleeve
- 6 **STEATITE DRY HEATING ELEMENT**
- 7 Stainless steel water inlet
- 8 Electronic thermostat

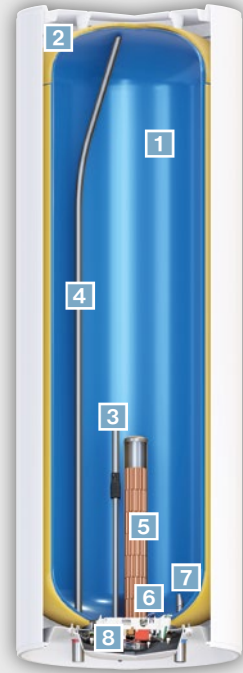

Patented ACi hybrid technology guarantees:

- Permanent tank protection for all water types
- Limited scaling and easy maintenance
- Immediate, permanent protection thanks to the combined continuous current generated by titanium and magnesium anodes

Zeneo

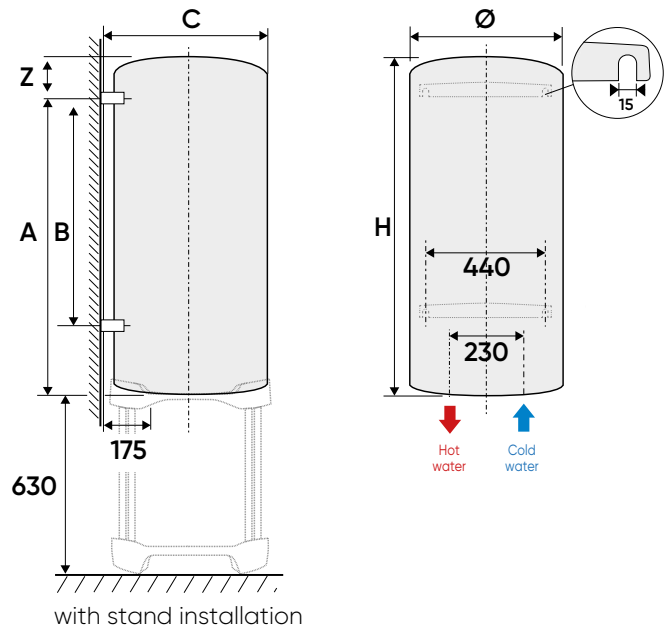

Technical specifications and installation dimensions


| Model | Output (W) | Voltage (V) | Heating time | Hot water capacity at 40°C | Cooling constant | Energy consumption kWh/24 h | Dimensions (mm) | | | | | | Net weight (kg) | ErP energy class | Profile | |
|--|------------|--|--------------|----------------------------|------------------|-----------------------------|-----------------|------|------|-----|-----|-----|-----------------|------------------|---------|--|
| | | | | | | | Ø | H | A | B | Z | C | | | | |
| Zeneo Standard Vertical wall-mounted | | | | | | | | | | | | | | | | |
| 50 | 1200 | 230 V single phase | 2h23 | - | 0.35 | 0.82 | 505 | 575 | 370 | - | 172 | 530 | 23 | A 15 C | M | |
| 75 | 1200 | 230 V single phase | 4h08 | 142 L | 0.28 | 1.08 | 513 | 705 | 570 | - | 135 | 530 | 23 | A 15 C | M | |
| 100 | 1200 | 230 V single phase | 5h27 | 177 L | 0.27 | 1.28 | 513 | 835 | 750 | - | 85 | 530 | 27 | A 15 C | L | |
| 150 | 1800 | 230 V single phase kit for 400 V 3-phase | 5h14 | 277 L | 0.23 | 1.65 | 513 | 1155 | 1050 | 800 | 105 | 530 | 35 | A 15 C | M | |
| 200 | 2200 | | 5h44 | 374 L | 0.20 | 1.94 | 513 | 1475 | 1050 | 800 | 425 | 530 | 45 | A 15 C | L | |
| Zeneo Vertical wall-mounted turbo range | | | | | | | | | | | | | | | | |
| 50 | 1800 | 230 V single phase kit for 400 V 3-phase | 1h27 | - | 0.35 | 0.82 | 505 | 575 | 370 | - | 172 | 530 | 23 | A 15 C | M | |
| 75 | 3000 | | 1h37 | 132 l | 0.31 | 1.11 | 510 | 735 | 575 | - | 135 | 530 | 27 | A 15 C | M | |
| 100 | 3000 | | 2h20 | 184 L | 0.28 | 1.34 | 510 | 900 | 750 | - | 85 | 530 | 30 | A 15 C | L | |
| 150 | 3000 | | 3h20 | 269 L | 0.22 | 1.56 | 530 | 1200 | 1050 | 800 | 105 | 550 | 39 | A 15 C | M | |
| 200 | 3000 | | 4h46 | 363 L | 0.20 | 1.87 | 530 | 1515 | 1050 | 800 | 425 | 550 | 49 | A 15 C | L | |

Technical specifications and installation dimensions

| Model | Output (W) | Voltage (V) | Heating time | Hot water capacity at 40°C | Cooling constant |
|---|------------|--|--------------|----------------------------|------------------|
| Zeneo Compact vertical wall-mounted (Ø 570 mm) | | | | | |
| 100 | 1200 | 230 V single phase | 5h29 | 177 L | 0.24 |
| 150 | 1800 | 230 V single phase kit for 400 V 3-phase | 5h09 | 278 L | 0.20 |
| 200 | 2200 | | 5h53 | 369 L | 0.20 |

| Energy consumption kWh/24 h | Dimensions (mm) | | | | | | Net weight (kg) | ErP energy class | Profile |
|---|-----------------|------|------|-----|-----|-----|-----------------|------------------|---------|
| | Ø | H | A | B | Z | C | | | |
| Zeneo Compact vertical wall-mounted (Ø 570 mm) | | | | | | | | | |
| 1.15 | 570 | 740 | 570 | - | 165 | 585 | 32 | C | L |
| 1.43 | 570 | 990 | 750 | 500 | 235 | 585 | 41 | C | M |
| 1.88 | 570 | 1245 | 1050 | 800 | 190 | 585 | 51 | C | L |

IP 25

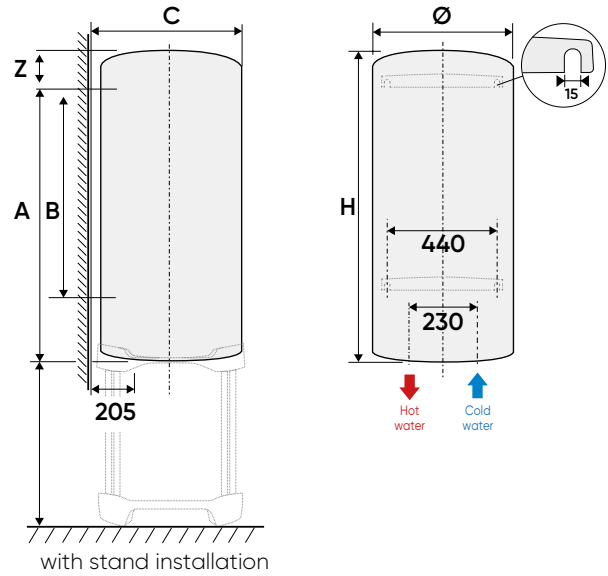


Technical specifications and installation dimensions

| Model | Output (W) | Voltage (V) | Heating time | Hot water capacity at 40°C | Cooling constant |
|-----------------------------|------------|--|--------------|----------------------------|------------------|
| Zeneo Floor-standing | | | | | |
| 150 | 1800 | 230 V single phase kit for 400 V 3-phase | 4h19 | 276 L | 0.23 |
| 200 | 2200 | | 5h14 | 376 L | 0.20 |
| 250 | 3000 | | 4h58 | 435 L | 0.19 |
| 300 | 3000 | | 6h18 | 537 L | 0.18 |

| Energy consumption kWh/24 h | Dimensions (mm) | | | | Net weight (kg) | ErP energy class | Profile |
|-----------------------------|-----------------|------|-----|-----|-----------------|------------------|---------|
| | Ø | H | A | C | | | |
| Zeneo Floor-standing | | | | | | | |
| 1.65 | 575 | 1015 | 280 | 645 | 42 | C | M |
| 1.88 | 575 | 1270 | 280 | 645 | 47 | C | M |
| 2.22 | 575 | 1510 | 280 | 645 | 53 | C | L |
| 2.49 | 575 | 1765 | 280 | 645 | 60 | C | L |

IP 25

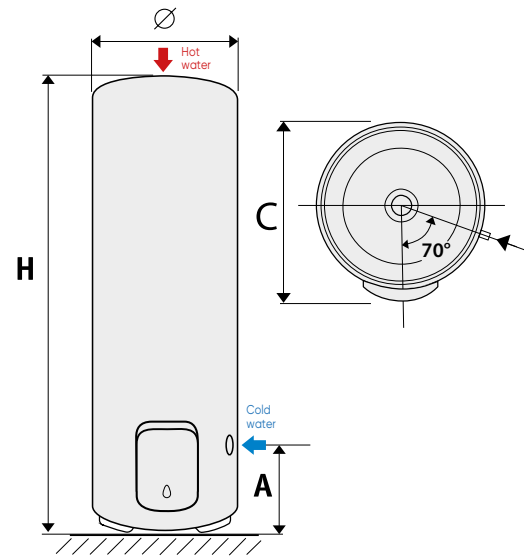

Technical specifications and installation dimensions

| Model | Output (W) | Voltage (V) | Heating time | Hot water capacity at 40°C | Cooling constant | Energy consumption kWh/24 h | Dimensions (mm) | | | | | | Net weight (kg) | ErP energy class | Profile |
|--------------------------------------|------------|--|--------------|----------------------------|------------------|-----------------------------|-----------------|------|-----|-----|-----|---|-----------------|------------------|---------|
| | | | | | | | Ø | H | A | B | Z | C | | | |
| Zeneo Horizontal wall-mounted | | | | | | | | | | | | | | | |
| 100 | 1800 | 230 V single phase kit | 2h59 | 171 L | 0.32 | 1.16 | 520 | 830 | 275 | 500 | 150 | - | 32 | C | L |
| 150 | 1800 | 230 V single phase kit for 400 V 3-phase | 4h20 | 251 L | 0.25 | 1.56 | 520 | 1140 | 575 | 800 | 150 | - | 39 | C | L |
| 200 | 2200 | | 5h08 | 332 L | 0.22 | 1.87 | 520 | 1460 | 575 | 800 | 470 | - | 49 | C | L |

IP 25

