

O'Pro Classic



ELECTRIC WATER HEATER

Models 50 to 100
(Vertical wall-mounted)

Models 50 to 100
(Horizontal wall-mounted)



Comfort

- Elegant design
- Control knob on the bottom of the tank
- Flat thermometer



Durability

- Long tank lifetime thanks to O'Pro exclusive anti-corrosive system
- Magnesium anode for strengthened tank protection
- Diamond-quality glass lining
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around flange



Installation

- Models available for both horizontal and vertical installation

Safe operation:

- IP 24 or IP 25 – full compliance with European standards for electrical safety and user protection



Energy savings

- Mechanical thermostat with integrated security
- High-efficiency water inlet
- CFC-free high-density polyurethane insulation



User-friendly

- Heating light indicator

1 DIAMOND-QUALITY GLASS LINING for long life and reliability

2 Optimised stainless steel outlet pipe

3 Hanging jig

4 Inlet diffuser

5 Copper heating element

6 O'Pro anti-corrosive system



7 Dielectric union

8 Thermostat

9 High-density, 0% CFC polyurethane foam

10 MAGNESIUM ANODE

11 External thermometer

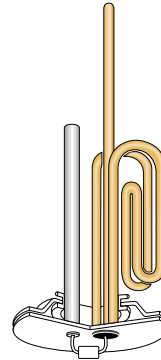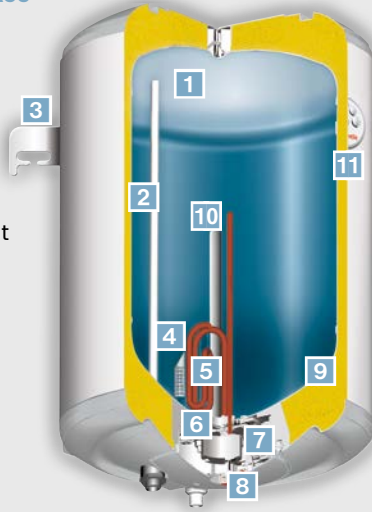

Video:



O'Pro
TECHNOLOGY

Exclusive anti-corrosive system

O'Pro technology uses an ohmic resistor to balance out the electric potential of both the tank and the heating element. This prolongs the life of the magnesium anode as well as bolstering protection against corrosion.


Technical specifications

Model	Ref.	Output (W)	Voltage (V)	Heat-up time at 60°C (Δt=20°C)	Heat-up time at 60°C (Δt=50°C)	Standby losses Kw/24h	ESMA energy efficiency
O'Pro Classic Vertical wall-mounted							
50	841274	1500	220-240	0h45	1h53	0.91	★★★★★
80	851257	1500	220-240	1h16	3h09	1.34	★★★★★
100	861291	1500	220-240	1h31	3h48	1.70	★★★★
O'Pro Classic Horizontal wall-mounted							
50	843032	1500	220-240	0h39	1h38	0.99	★★★★★
80	853063	1500	220-240	1h03	2h38	1.41	★★★★★
100	863071	1500	220-240	1h26	3h36	1.74	★★★★



Installation dimensions (mm)

Model	Ref.	Dimensions (mm)							Flange opening (Ø) mm	Net weight (kg)
		A	B	C	D	E	F	G		
O'Pro Classic Vertical wall-mounted										
50	841274	612	433	380	451	165	300	240	78	15
80	851257	859	433	590	451	165	300	240	78	21
100	861291	1021	433	740	451	165	300	240	78	24
O'Pro Classic Horizontal wall-mounted										
50	843032	596	433	160	451	234	343	-	78	15
80	853063	843	433	335	451	234	343	-	78	21
100	863071	1005	433	486	451	234	343	-	78	24

IP 25 vertical IP 24 horizontal



VERTICAL WALL-MOUNTED

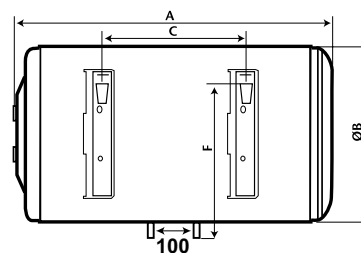

HORIZONTAL WALL-MOUNTED

