

Calypso Split Inverter

ECO-EFFICIENT, SMART AND ECONOMICAL HEAT PUMP WATER HEATER

Models 150 & 200 L (Wall-mounted)
Model 270 L (Floor-standing)



BENEFITS

- Low noise level (50 dB) for installation in living areas
- Photovoltaic connection to benefit from free solar energy
- Designed to be installed in geographic areas where the temperature ranges from -15°C to 37°C
- Wi-Fi connectivity and remote piloting
- Ergonomic digital interface with ABSENCE, MANUEL and ECO+ modes to adapt to your hot water requirements



+ EASY PROGRAMMING WITH DIGITAL CONTROL PANEL



Information display
Follow instructions


Increase/Browse
Quick access
to Boost and
Absence modes

Validation button

Back button

Decrease/Browse
Quick access
to Boost and
Absence modes

Menu

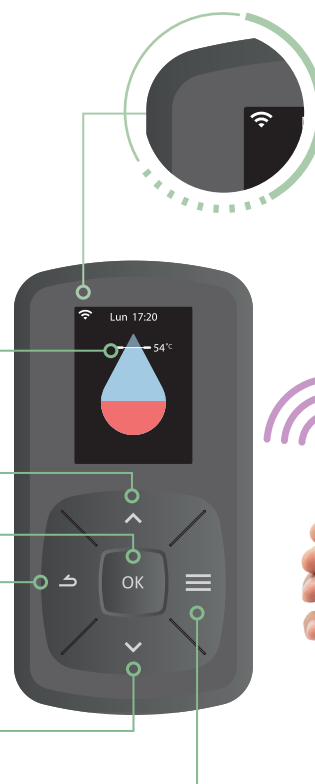

WI-FI CONNECTIVITY & REMOTE CONTROL

With Cozytouch App you can:

- Manage your water heater from everywhere
- Monitor your energy consumption
- Tailor your home comfort to your needs
- Switch off water heater when you are out



Cozytouch

Download the APP for free




Calypso Split Inverter

Models 150 & 200 L (Wall-mounted)
Model 270 L (Floor-standing)

+ PROVEN QUALITY WITH ACI HYBRID TECHNOLOGY

- 1 Digital interface
- 2 Enamelled steel tank
- 3 1800W stainless steel back-up heater
- 4 ACI Hybrid anti-corrosion technology
- 5 Condenser
- 6 Hot water inlet and outlet pipes
- 7 Refrigerant fluids
- 8 Wall mounts

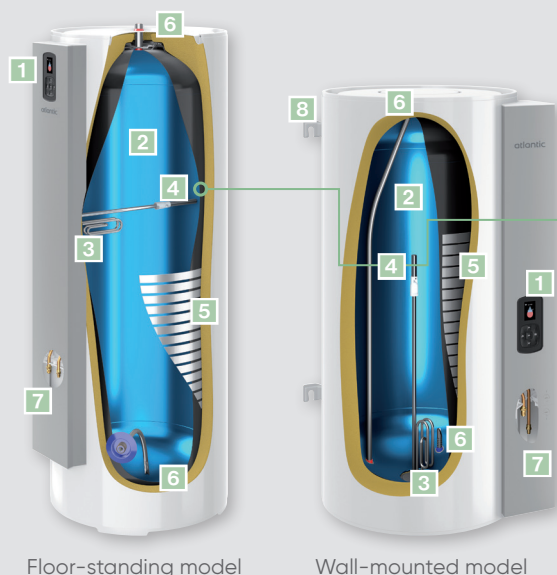


ACI HYBRID TECHNOLOGY GUARANTEES YOU:

- Permanent and immediate protection of the tank in all types of water thanks to an anti-corrosive system with forced current and magnesium-coated titanium anode
- Limited scalling and easy maintenance



Atlantic International a simplified joint stock company with €2 000 007, 17 rue Croix Faudet - RCS Orleans B 390 284 693 - No contractual pictures - February 2023 - www.L2R.fr

+ EASY INSTALLATION

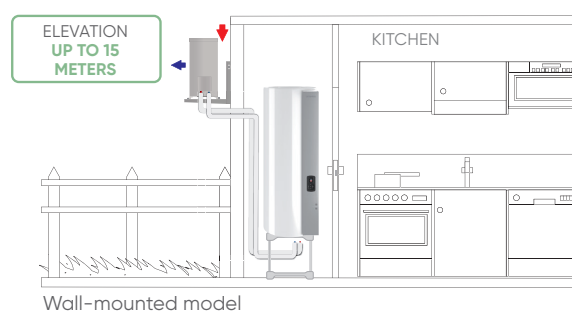

Technical data

Model	Capacity (L)	Heating element power (W)	Maximum heat pump power consumption (W)	COP (at Tair = 7°C ducted, Twater from 15°C to 53°C)	V40 ErP (L)	Energy efficiency	Heating time	Refrigerant fluid	Fluid charge	Acoustic power (dB(A))	Dimensions (height x width x depth) (mm)	Weight (kg)	ErP Class
Wall-mounted	150	1800 W	-	3,09 (L)	235	127 %	2h22	-	-	-	1177x567x586	53	A+
Wall-mounted	200	1800 W	-	3,07 (L)	303	126 %	2h59	-	-	-	1497x567x586	63	A+
Floor-standing	270	1800 W	-	3,37 (XL)	417	138 %	3h46	-	-	-	1586x617x651	73	A+
Outdoor unit	-	-	1450 W	-	-	-	-	R32	700	50	535x735x330	24	-