

# Vertigo

SPACE-SAVING WATER HEATER WITH FLAT DESIGN



## + PRODUCT

### COMFORT

- Space-saving solution for easy integration
- Flat design (less than 30 cm depth)
- Multiposition installation: Can be installed both vertically and horizontally to fit in living rooms, bathrooms and kitchens
- Permanent comfort guaranteed: 1 shower in less than 50 minutes

### QUALITY - DURABILITY

- Double sheathed heating element
- Long tank lifetime thanks to O'Pro exclusive anti-corrosive system
- Magnesium anode for strengthened tank protection
- New generation diamond-quality enamel (glass-lined inner tank)
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around flange

### USER-FRIENDLINESS


- IP 24 - full compliance with European standards for electrical safety and user protection
- Easy installation with wall-mounting plates and drilling template
- Intuitive interface with Shower-ready indicator
- Heating light indicator

### SAVINGS

- Accurate mechanical thermostat
- High-efficiency water inlet
- CFC-free high-density insulation for more energy savings

## ELECTRIC WATER HEATER

## 25 TO 80 L (MULTIPOSITION INSTALLATION)



Model available\*\*




More hot water



Intuitive interface

**MAGNESIUM ANODE**

Tank protection




Copper heating element

\*Depending on models - \*\*Model types: A: Vertical wall-mounted / B: Horizontal wall-mounted / C: Floor-standing / D: Multiposition installation

# Vertigo



- 1 Diamond-quality enamel (glass-lined inner tank)
- 2 Optimised stainless steel outlet pipe
- 3 Sheathed immersion heating element
- 4 Inlet diffuser
- 5 Intuitive interface
- 6 High-density polyurethane foam 0 % CFC
- 7 Magnesium anode
- 8 O'Pro anti-corrosive system




- 1 Shower-ready indicator: Light is on when at least one shower is available
- 2 Quick mode selection control knob
- 3 Manual mode: Manual selection of hot water quantity
- 4 Anti-frost mode (7°C)

**O'Pro**  
Olimic protection

O'Pro exclusive anti-corrosive system balances out the electrical potential of the tank and immersion heating element. Thus, the magnesium anode life is considerably increased and protection against corrosion is reinforced.

**+50% TANK LIFETIME**

## INSTALLATION DIMENSIONS

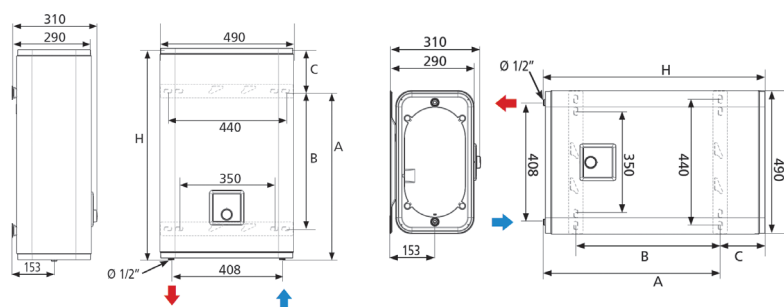

## TECHNICAL DATA

| MODEL       | CAPACITY (L) | POWER OUTPUT EXIT TANK (W) | POWER OUTPUT ENTRY TANK (W) | TOTAL HEAT-UP TIME $\Delta T=50^{\circ}\text{C}$ ( $15^{\circ}\text{C} \rightarrow 65^{\circ}\text{C}$ ) | HEAT-UP TIME EXIT TANK |
|-------------|--------------|----------------------------|-----------------------------|--|------------------------|
| Vertigo 30  | 25           | 1000                       | 1000                        | 1h32   | 0h46                   |
| Vertigo 50  | 40           | 1500                       | 1000                        | 2h02   | 0h49                   |
| Vertigo 80  | 65           | 1500                       | 1000                        | 3h19   | 1h19                   |
| Vertigo 100 | 80           | 1500                       | 1000                        | 4h04   | 1h38                   |

## DIMENSIONS

| MODEL       | DIMENSIONS (mm) |           |                          |      |     |     | NET WEIGHT (kg) | ERP ENERGY EFFICIENCY CLASS | PROFILE |
|-------------|-----------------|-----------|--------------------------|------|-----|-----|-----------------|-----------------------------|---------|
|             | HEIGHT (H)      | WIDTH (W) | DEPTH <sup>(1)</sup> (D) | A    | B   | C   |                 |                             |         |
| Vertigo 30  | 600             | 490       | 290                      | 435  | 280 | 165 | 17              | B                           | S       |
| Vertigo 50  | 765             | 490       | 290                      | 610  | 500 | 155 | 21              | C                           | M       |
| Vertigo 80  | 1090            | 490       | 290                      | 975  | 700 | 115 | 29              | C                           | M       |
| Vertigo 100 | 1300            | 490       | 290                      | 1185 | 800 | 115 | 34              | C                           | M       |

(1) Without wall plate