

Steatite

STEATITE TECHNOLOGY WATER HEATER
WITH VERY ACCURATE CONTROLS



+ PRODUCT

COMFORT

- Frontal control knob for most accurate temperature control
- Flat chromed thermometer*

QUALITY - DURABILITY

- Steatite technology: Ceramic dry heating element adapted to aggressive, hard or desalinated water
- Magnesium anode for strengthened tank protection
- New generation diamond-quality enamel (glass-lined inner tank)
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around flange

USER-FRIENDLINESS


- IP 24 - full compliance with European standards for electrical safety and user protection
- Plug**
- Heating light indicator

SAVINGS

- Accurate controls ensured by highly sensitive thermostat
- High-efficiency water inlet
- CFC-free high-density insulation for more energy savings

ELECTRIC WATER HEATER

50 TO 200 L
(VERTICAL WALL-MOUNTED)



Model available***



Frontal control knob



Easy maintenance

**MAGNESIUM
ANODE**

Tank protection



Dry ceramic heating element

*Only for 50 L to 100 L. **Depending on models - ***Model types: A: Vertical wall-mounted / B: Horizontal wall-mounted / C: Floor-standing

Steatite




- 1 External thermometer
- 2 Diamond-quality enamel (glass-lined inner tank)
- 3 Optimised stainless steel outlet pipe
- 4 Magnesium anode
- 5 Steatite dry heating element
- 6 Inlet diffuser
- 7 Enamelled sleeve
- 8 High-density polyurethane foam 0% CFC
- 9 Frontal control knob
- 10 Dielectric union
- 11 Thermostat



Thanks to the unique Steatite technology, the water heater is well adapted to aggressive, hard and desalinated water. Ceramic heating element is protected by enamelled steel sleeve, which grants a large heat exchange surface and reduces limescale deposits.

INSTALLATION DIMENSIONS

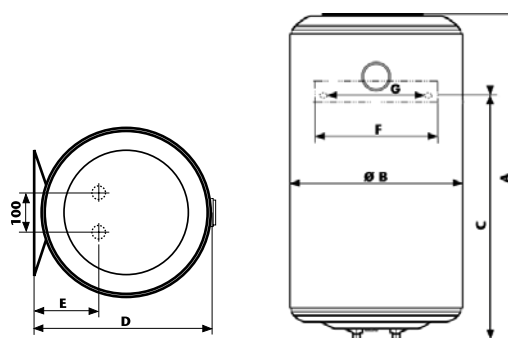

TECHNICAL DATA

CAPACITY (L)	OUTPUT (W)	VOLTAGE (V)	ENERGY CONSUMPTION (kWh/24 h AT 65°C)	HEAT-UP TIME AT 60°C (ΔT=50°C)
50	1500	230 (220/240)	0.95	1h50
80	1500	230 (220/240)	1.35	3h19
100	1500	230 (220/240)	1.7	4h24
150	1800	230 (220/240)	1.59	5h16
200	2400	230 (220/240)	1.94	5h20

DIMENSIONS

CAPACITY (L)	DIMENSIONS (mm)							FLANGE OPENING (Ø) mm	NET WEIGHT (kg)	ERP ENERGY CLASS	PROFILE
	A	B	C	D	E	F	G				
50	629	433	395	451	158	300	239	72	15	C	M
80	876	433	605	451	158	300	239	72	21	C	L
100	1038	433	755	451	158	300	239	72	24	C	L
150	1220	505	800	520	169	–	440	72	41	C	M
200	1550	505	800	525	170	–	440	72	51	C	L