

Steatite

ACCURATE CONTROLS, LONG-LASTING WATER HEATER WITH STEATITE TECHNOLOGY

Models 50 to 100 (vertical wall-mounted)



BENEFITS

- Steatite heating element protected by a enamelled sleeve for limited scaling and easy maintenance
- Easy maintenance: no need to drain the tank
- New waterdrop LED heating indicator
- Energy savings: Eco mode, Absence mode
- Optimized water inlet diffuser for more and continuous hot water supply



Steatite
TECHNOLOGY

+ EASY PROGRAMMING WITH FRONTAL CONTROL KNOB



NEW CONTROL
KNOB WITH
WATERDROP
HEATING LIGHT

N
NEW

Easy-to-use:

New waterdrop led heating indicator and control knob with eco and absence modes for more energy savings.


Eco mode for optimal energy consumption

Absence position (7°)

Steatite

Models 50 to 100 (vertical wall-mounted)


+ LONG TIME OPERATION THANKS TO STEATITE

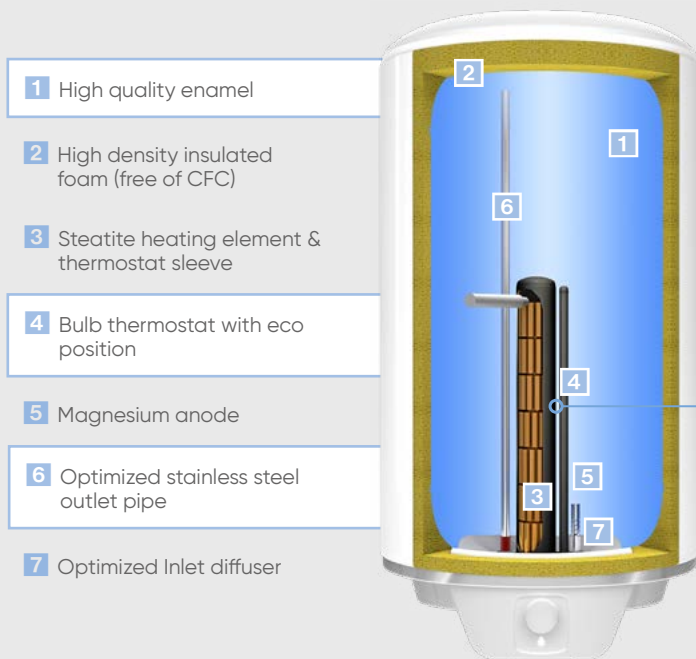

Steatite TECHNOLOGY

DRY STEATITE HEATING ELEMENT


Adapted to aggressive, highly mineralised and desalinated water. Its protective enamelled steel sleeve makes maintenance easy, and no need to drain the tank to replace it.



+ EASY INSTALLATION

Installation dimensions

Model	Dimensions (mm)							Net weight (kg)
	A	B	C	D	E	F	G	
Vertical wall-mounted								
50	607	433	395	450	158	300	240	15,2
80	806	433	605	450	158	300	240	19,7
100	1008	433	747	450	158	300	240	23,5

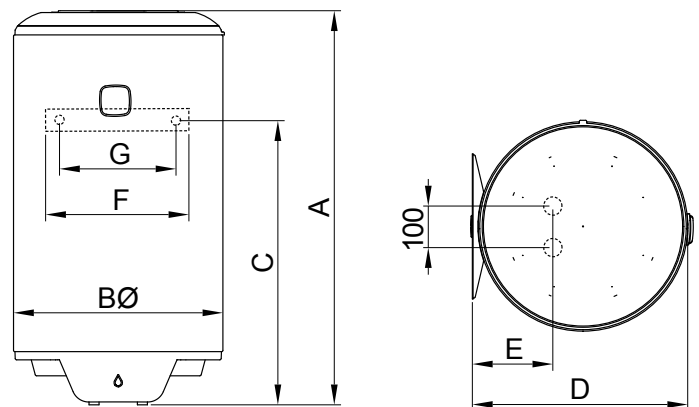

Technical data

Model	Output (W)	Voltage (V)	QPR (kWh/24)	Heat-up time at 60°C (Δt=50°C)	Profile	Erp energy class
Vertical wall-mounted						
50	1500	220-240	0,85	2h07	M	A+ F C
80	1500	220-240	1,25	3h11	M	A+ F C
100	1500	220-240	1,60	4h15	L	A+ F C