

Nanto



ELECTRIC WATER HEATER

Models 10 to 30
(Above and under sink)



Comfort

- Fast heating time
- Dedicated solution ensuring direct hot water availability



Durability

- Extended tank life thanks to O'Pro exclusive anti-corrosive protection
- Magnesium anode to bolster tank protection
- Diamond-quality glass lining
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around the flange



Installation

- Above and under sink versions available
- Easy installation with wall-mounting plate
- Visual product guide for simple installation on wall plates



Safe operation:

IP 24 - full compliance with European standards for electrical safety and user protection



Energy savings

- Eco and Absence modes to increase energy savings
- High-efficiency water inlet
- CFC-free high-density polyurethane insulation




User-friendly

- Front control knob for quick mode selection
- Heating and shower ready light indicator





- 1** DIAMOND-QUALITY GLASS LINING for extended life and increased reliability
- 2** Optimised stainless steel outlet pipe
- 3** High-density, 0% CFC polyurethane foam
- 4** MAGNESIUM ANODE for protection against corrosion
- 5** Copper heating element
- 6** Optimised Inlet diffuser

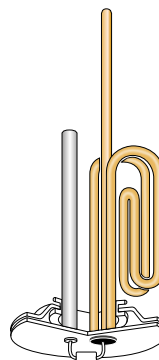

Exclusive anti-corrosive system

O'Pro technology uses an ohmic resistor to balance out the electric potential of both the tank and the heating element. This prolongs the life of the magnesium anode as well as bolstering protection against corrosion.

Video:




Technical specifications


Model	Ref.	Installation type	Output (W)	Voltage (V)	Heat-up time ($\Delta t=50^{\circ}\text{C}$) (min)	Heat-up time ($\Delta t=35^{\circ}\text{C}$) (min)	Standby losses (kWh/24 h at 65°C)	Profile
10	821538	Above sink	1200	230 / 220-240*	18	12	0.48	XXS
10	821539	Under sink	1200	230 / 220-240*	18	12	0.48	XXS
15	821540	Above sink	1500	230 / 220-240*	27	18	0.58	XXS
15	821541	Under sink	1500	230 / 220-240*	27	18	0.58	XXS
30	821242	Above sink	1500	230 / 220-240*	53	37	0.84	S

Installation dimensions (mm)

Model	Ref.	Inlet/outlet connections	Installation type	Dimensions (mm)						Flange opening (\varnothing) mm	Net weight (kg)
				A	B	C	D	E	F		
10	821538	1/2"	Above sink	387	360	262	100	100	62	78	6.9
10	821539	1/2"	Under sink	378	360	262	100	100	62	78	6.9
15	821540	1/2"	Above sink	387	360	321	100	100	62	78	8.0
15	821541	1/2"	Under sink	378	360	321	100	100	62	78	8.0
30	821242	1/2"	Above sink	467	440	388	111	100	62	78	11.8



ABOVE SINK MODEL



UNDER SINK MODEL

* Depending on models