


# F19 Design



## ACTIVE HEAT CONVECTOR

Models 500 to 2500W

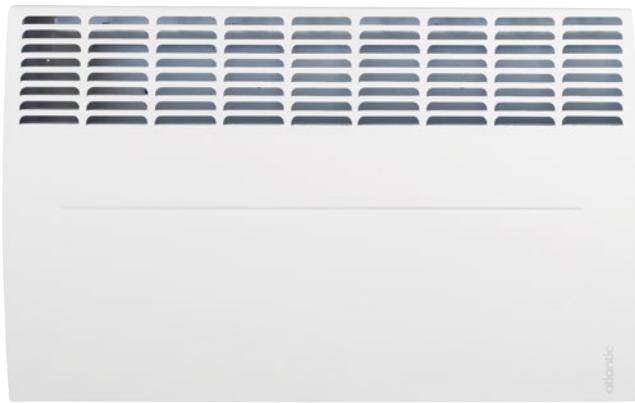

### Comfort



- Efficient heat distribution across the appliance's surface
- Sheathed heating element with an aluminium diffuser

### Design



- High-end modern design
- Stamped front air outlet
- Available model:
  - Horizontal
  - ↔ Vertical
- Colour:
  - White (RAL 9016)

### Installation



- Class II and IP 24 protection with dual electric insulation for maximum safety
- Easy to install: H-shaped vertical support\*
- Models with plug and standing kit\*\*

### Energy savings



- Enhanced multi-frequency thermostat

### User-friendly



- Control knob



1 Temperature control knob

2 On/Off switch

\*For fixed models only (non-ErP-compliant). \*\*For mobile models only (ErP-compliant).

- 1** Control knob
- 2** Air outlet
- 3** OVERHEATING SAFETY DEVICE
- 4** SHEATHED HEATING ELEMENT WITH ALUMINIUM DIFFUSER
- 5** Room temperature sensor
- 6** Front panel
- 7** Anti-tilt sensor



## Technical specifications

Output (W)	Dimensions (mm)						Net weight (kg)
	Width (W)	Height (H)	Depth (D)	A	B1	B2	
500	391	461	114	122	256	158	3.1
1000	465	461	114	196	256	158	3.6
1500	613	461	114	344	256	158	4.5
2000	761	461	114	492	256	158	5.4
2500	909	461	114	640	256	158	6.3

CE Class II IP 24

