

Indirect



INDIRECT WATER HEATER

Models 100 to 200
(Vertical wall-mounted)

Models 200 to 300
(Floor-standing)



The Indirect water heater ensures steady hot water via its coil exchanger, relying on continuous energy from power sources such as boilers, heat pumps, or solar installations year-round.



Comfort

- Fast production of large hot water volumes all year round



Durability

- Magnesium anode for better tank protection
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around the flange



Installation

- IP 25 - full compliance with European standards for electrical safety and user protection for wall-mounted models
- IP 24 - full compliance with European standards for electrical safety and user protection for floor-standing models
- Easy insertion of the hot water regulation probe into the boiler's designated spot for seamless operations
- Top and bottom handles for better grip ⁽¹⁾
- Fully detachable next-generation screw-fixed hood ⁽¹⁾
- Built-in cable gland ⁽¹⁾



Energy savings

- High-efficiency water inlet
- Heating system connection to enable cost-effective production
- Energy class B thanks to the insulation of the reinforced tank (0% CFC foam)

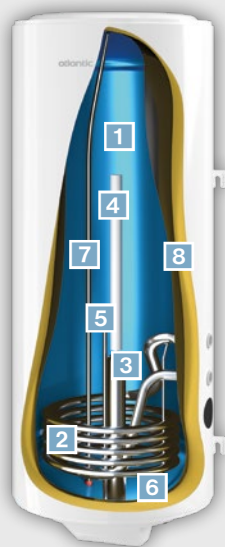
1 ENAMELLED STEEL TANK
2 Coil

3 Enamelled steel sleeve for heating element

4 MAGNESIUM ANODE
5 Probe finger

6 Inlet diffuser

7 Hot water pipe

8 High density polyurethane foam 0% CFC


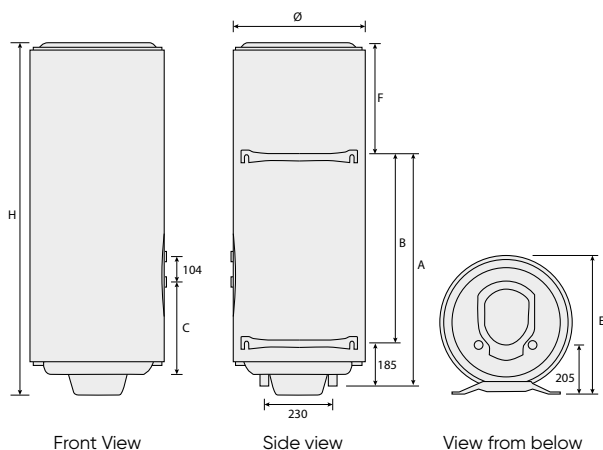
Technical specifications

Model	Capacity (L)	Coil surface (m ²)	Coil pressure (bar)	Heat-pump time (min. TP 55°C)	Coil power (Kw) 80°C/m ²	Maintenance Cons.	Pressure loss (Mbar)	ErP Class
Vertical wall-mounted								
VM 100	100	0.57	10	35	16	0.86	25	A B
VM 150	150	0.69	10	40	16.7	1.14	30	A B
VM 200	200	0.69	10	50	16.7	1.4	30	A B
Floor-standing								
FS 200	200	1.01	10	35	23	1.31	35	A B
FS 300	300	1.26	10	45	24.7	1.64	40	A B

Installation dimensions (mm)

Model	Capacity (L)	Diameter (Ø)	Dimensions (mm)							Net weight (kg)
			H	A	B	C	D	E	F	
Vertical wall-mounted										
VM 100	100	575	835	685	500	377	-	595	150	38
VM 150	150	575	1150	975	800	435	-	595	165	49
VM 200	200	575	1470	985	800	435	-	595	485	59
Floor-standing										
FS 200	200	635	1245	-	559	526	480	690	405	70
FS 300	295	635	1740	-	1013	570	522	690	448	100

WALL-MOUNTED MODEL



FLOOR-STANDING MODEL

