

# O'Pro Classic 800W



## ELECTRIC WATER HEATER

**Models 50 to 100**  
(Horizontal wall-mounted)



### Comfort

- Elegant design
- Control knob on the bottom of the tank
- Flat thermometer



### Durability

- Long tank lifetime thanks to O'Pro exclusive anti-corrosive system
- Magnesium anode for strengthened tank protection
- Diamond-quality glass lining
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around flange



### Installation

#### Safe operation:

- IP 24 or IP 25 - full compliance with European standards for electrical safety and user protection



### Energy savings



- Mechanical thermostat with integrated security
- High-efficiency water inlet
- CFC-free high-density polyurethane insulation



### User-friendly

- Heating light indicator

- 1 **DIAMOND-QUALITY GLASS LINING** for long life and reliability
- 2 Optimised stainless steel outlet pipe
- 3 Hanging jig
- 4 Inlet diffuser
- 5 Copper heating element
- 6 O'Pro anti-corrosive system
- 7 Dielectric union
- 8 Thermostat
- 9 High-density, 0% CFC polyurethane foam
- 10 **MAGNESIUM ANODE**
- 11 External thermometer

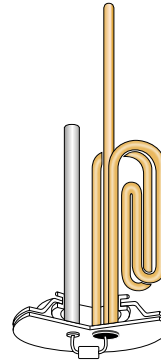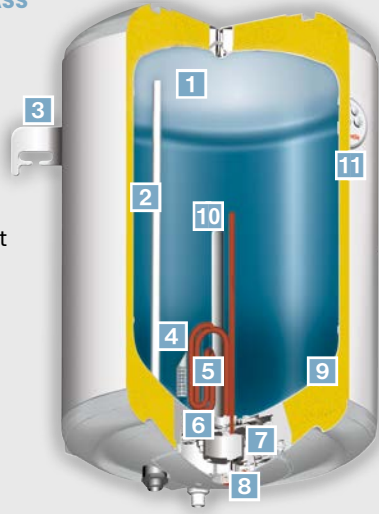

O'Pro  
TECHNOLOGY

### Exclusive anti-corrosive system

O'Pro technology uses an ohmic resistor to balance out the electric potential of both the tank and the heating element. This prolongs the life of the magnesium anode as well as bolstering protection against corrosion.

Video:





## Technical specifications

Model	Ref.	Output (W)	Voltage (V)	Heat-up time at 60°C (Δt=20°C)	Heat-up time at 60°C (Δt=50°C)	Standby losses Kw/24h	ESMA energy efficiency
<b>O'Pro Classic 800 W Horizontal wall-mounted</b>							
50	843037	800	220-240	1h15	3h04	1.00	★★★★★
80	853068	800	220-240	1h59	4h58	1.40	★★★★★
100	863075	800	220-240	2h42	6h45	1.70	★★★★

IP 24

## Installation dimensions (mm)

Model	Ref.	Dimensions (mm)							Flange opening (Ø) mm	Net weight (kg)
		A	B	C	D	E	F	G		
<b>O'Pro Classic 800 W Horizontal wall-mounted</b>										
50	843037	596	433	160	451	234	343	-	78	15
80	853068	843	433	335	451	234	343	-	78	21
100	863075	1005	433	486	451	234	343	-	78	24

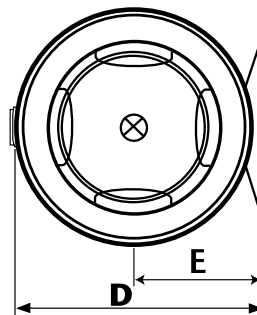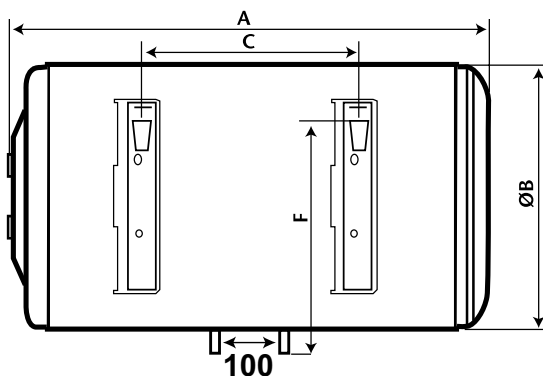

HORIZONTAL WALL-MOUNTED