

# Oniris Smart Pilot IO

SLIM-LINE DESIGN RADIATOR WITH SMART ENERGY-SAVING FUNCTIONS



## + PRODUCT

### COMFORT

- Homogeneous and gentle heat diffusion
- Double heating element: Aluminium heating element + wide heating front film
- Remote piloting through a smartphone or a tablet thanks to Cozytouch compatibility

### SAVINGS

- Up to 45% energy savings\* through finest digital controls, programming and absence/presence sensor\*\*
- Smart Pilot functions\*\* memorising user's life rhythm & comfort requirements to drive optimal energy savings
- Open/closed window detection\*\* function switching to Anti-frost mode as soon as a window opens
- 6-command pilot wire: Comfort, Comfort - 1°C, Comfort - 2°C, Eco, Anti-frost, Off
- Energy consumption indicator for responsible & informed use of the equipment
- ErP-compliant

### USER-FRIENDLINESS

- LCD digital controls showing temperature and energy consumption
- ASP (Anti-Staining Process) to reduce staining on wall and on equipment
- Easy to install: H-shaped vertical support
- Editable integrated programming

### DESIGN

- Elegant slim-line design
- Available in horizontal, vertical and plinth versions
- Colours: Anthracite (RAL 7016) and white (RAL 9016)

## GENTLE HEAT RADIATOR

750 TO 2000 W  
(HORIZONTAL)

1000 TO 2000 W  
(VERTICAL)

750 TO 1500 W  
(PLINTH)



Model available\*\*\*



Digital controls



Energy savings



Smart Pilot

Technology



Heating element type

# Oniris Smart Pilot IO




- 1 Digital controls
- 2 Aluminium heating element
- 3 Aluminium front panel
- 4 Heating film on front panel
- 5 Overheating safety device
- 6 Room temperature sensor
- 7 Movement and light sensors\*



- 1 Menu button to access various functions
- 2 Energy consumption indicator
- 3 On/Off switch
- 4 Menu navigation, temperature & active mode-setting buttons

## INSTALLATION DIMENSIONS

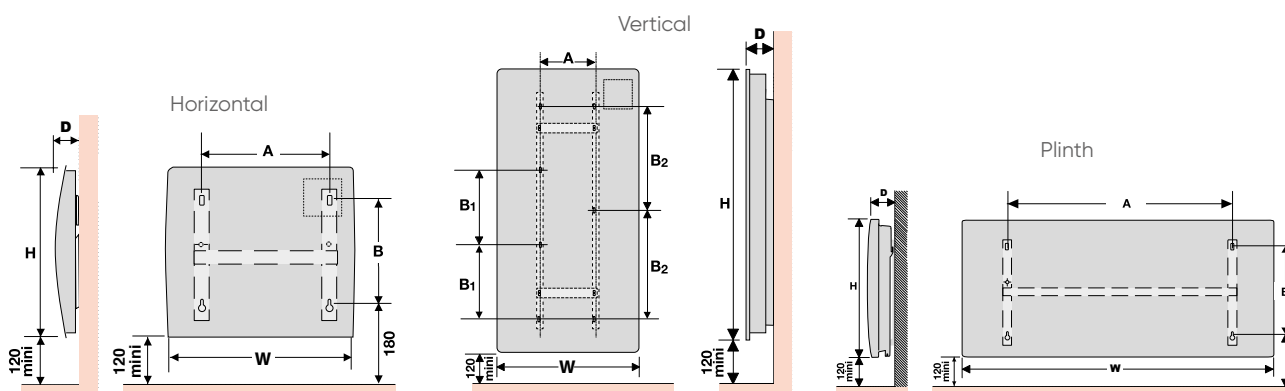

## TECHNICAL DATA

OUTPUT (W)	DIMENSIONS (MM)							NET WEIGHT (Kg)
	WIDTH (W)	HEIGHT (H)	DEPTH (D)	A	B	B1	B2	
<b>Oniris Smart Pilot IO Horizontal</b>								
750	613	615	110	383	341	-	-	10.8
1000	761	615	110	531	341	-	-	13
1250	909	615	110	679	341	-	-	15.4
1500	1058	615	110	827	341	-	-	18
2000	1205	615	110	975	341	-	-	20.4
<b>Oniris Smart Pilot IO Vertical</b>								
1000	470	1120	149	338	282	453	383	18
1500	470	1340	149	338	376	453	383	20
2000	470	1540	149	338	376	453	383	23
<b>Oniris IO Plinth</b>								
750	886	300	108	755	172	-	-	8
1000	1034	300	108	903	172	-	-	9
1500	1550	300	108	1369	172	-	-	14

\*Not available for Oniris IO Plinth