


the **HAMWORTHY**

BRAZED PLATE HEAT EXCHANGER

900kW

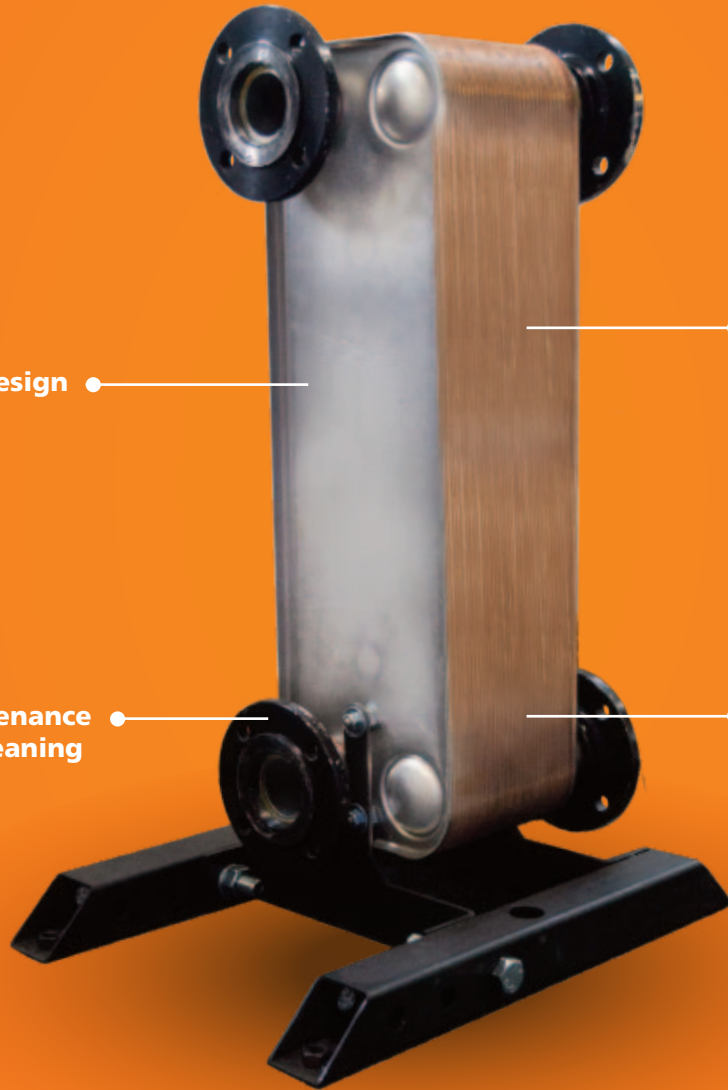

Compact design

Separates system water from the boiler

Low maintenance and self-cleaning

Used with Hamworthy Heating Cascade kits



SCAN ME

hamworthy-heating.com
sales@hamworthy-heating.com | 01202 662500



Technical submittal


Products: **Brazed Plate Heat Exchanger – 900kW**

Project:

Customer:

Date:

900kW is the nominal capacity of the plate heat exchanger applying the operating conditions shown below. Please contact Hamworthy Heating to confirm the expected performance if the operating conditions differ from those shown.

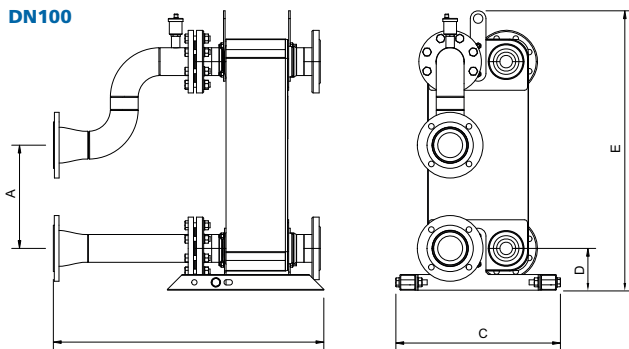

Dimensions

Dimension	A	B	C	D	E
DN100	330	865	526	200	960

	UNITS	HOT SIDE	COLD SIDE
Mass flow rate	kg/s	10.8	10.8
Inlet temperature	°C	80	50
Outlet temperature	°C	60	70
Pressure drop	kPa	14.6	19.9
Heat exchanged	kW	900	
Heat transfer area	m ²	21.7	
Flow configuration	Countercurrent		
Number of plates / thickness	88 / 0.3 mm		
Number of passes	passes	1	1
Pressure vessel code	PED		
Design pressure at 90.00 Celsius	Bar	19	19
Design pressure at 225.0 Celsius	Bar	15	15
Design temperature	°C	-196.0 / 225.0	
Overall length x width x height	mm	359 x 324 x 959	
Volume	L	28.0	17.9
Net weight, empty / operating	kg	75.8/ 121	

Standard Materials

Cover plates	Stainless steel
Connections	Stainless steel
Plates	Stainless steel
Brazing	Copper

PLEASE NOTE:
The plate heat exchangers are to be used for system separation only.
They must not be used for the direct production of domestic hot water.

They should not be used for direct heating of swimming pool water where the chlorinated pool water would pass directly through the plate heat exchanger.

Connections

FRAME & HEADER

Stratton mk3	DN50	DN80	DN100
			✓
System			
DN80			
Flanged			
PN25			