

## Genius Steatite

LOW MAINTENANCE, LONG-LASTING WATER HEATER WITH STEATITE TECHNOLOGY

Models 50 to 100 (vertical wall-mounted)



### BENEFITS

- Elegant design for easy integration in any home interior
- Steatite heating element protected by a sleeve for limited scaling and easy maintenance
- Ergonomic digital interface with heating indicator, operating modes and smart functions
- Energy savings: Eco+ mode, Absence mode



**Steatite**  
TECHNOLOGY

### + EASY PROGRAMMING WITH DIGITAL CONTROL PANEL



### ADAPTS TO YOUR NEEDS

**Eco+ mode** keeps track of your daily habits to provide only as much hot water as you need, saving both money and energy.

**Maximum heating**  
for extra water needs

**Waterdrop LED Indicator:**  
level of hot water ready to use

**Absence mode:**  
anti-frost position (7 °C)

**Manual mode:**  
selection of required hot water quantity



## Genius Steatite

Models 50 to 100 (vertical wall-mounted)

### + PROVEN QUALITY WITH STEATITE TECHNOLOGY



**1 DIAMOND QUALITY GLASS LINING** for long life and reliability

**2** Optimized stainless steel outlet pipe

**3** High density PU foam 0% CFC

**4 MAGNESIUM ANODE** for protection against corrosion


**5** Optimized Inlet diffuser

**6 ELECTRONIC REGULATION** for temperature control accuracy

**Steatite**  
TECHNOLOGY

#### DRY STEATITE HEATING ELEMENT

Adapted to aggressive, highly mineralised and desalinated water. Its protective enamelled steel sleeve makes maintenance easy, and no need to ever drain the tank to replace it.




### + EASY INSTALLATION

- Wall mounted plates and drilling template available on the packaging
- Easy grip thanks to a brand new top and bottom cover design

#### Installation dimensions

Model	Dimensions (mm)							Flange opening (ø) mm
	A	B	C	D	E	F	G	
Genius Steatite 50	608.5	445	459	240	210	165.5	1/2"	72
Genius Steatite 80	805.5	445	459	240	197	165.5	1/2"	72
Genius Steatite 100	968.5	445	459	240	211	165.5	1/2"	72

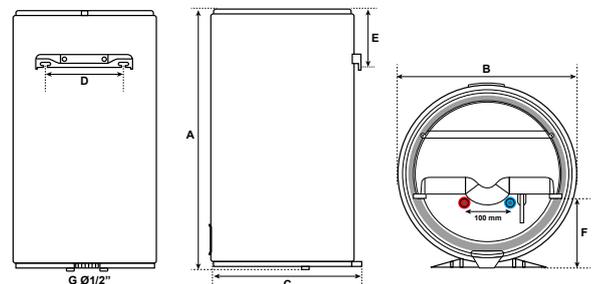

#### Technical data

Model	Number of users	Output (W)	Voltage (V)	Heat-up time from 15°C to 65°C	Net weight (kg)	Profile	Erp energy class
Genius Steatite 50		1800	220/240	1h37	20	M	
Genius Steatite 80		1800	220/240	2h25	25	M	
Genius Steatite 100		1800	220/240	3h14	30	M	

CE ENE IP 24