

O'Pro Slim HZ



ELECTRIC WATER HEATER

Models 50 to 75
(Horizontal wall-mounted)



Comfort

A dedicated range to answer low false ceiling height :

- Left side connections for space saving .
- Maximum 340mm external diameter, allowing slimmer installation
- 1200W copper heating element for comfort and energy saving



Durability

- +50% tank lifetime thanks to O'Pro unique anti-corrosive system
- Magnesium anode for strengthened tank protection
- Diamond-quality glass lining
- Specific lip gasket to avoid corrosion around flange



Installation


Safe operation:

- IP 24 - full compliance with European standards for electrical safety and user protection




Energy savings

- CFC-free high-density polyurethane insulation
- High-efficiency water inlet

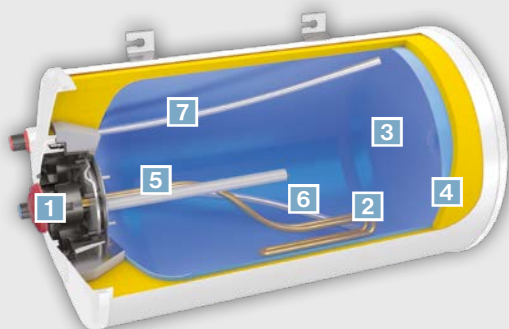

- 1 Control knob
- 2 Copper heating element
- 3 **DIAMOND-QUALITY GLASS LINING** for long life and reliability
- 4 High-density, 0% CFC polyurethane foam
- 5 **MAGNESIUM ANODE** for strengthened tank protection
- 6 Inlet diffuser
- 7 Optimised stainless steel outlet pipe

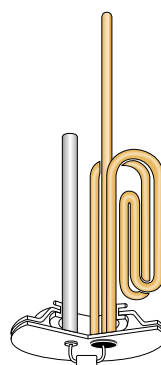

Video:



O'Pro
TECHNOLOGY

Exclusive anti-corrosive system

O'Pro technology uses an ohmic resistor to balance out the electric potential of both the tank and the heating element. This prolongs the life of the magnesium anode as well as bolstering protection against corrosion.

Technical specifications

Model	Ref.	Output (W)	Voltage (V)	Frequency
50	843070	1200	220 - 240	50-60 Hz
75	853099	1200	220 - 240	50-60 Hz

Installation dimensions (mm)

Model	Ref.	inlet/outlet connexions	Dimensions (mm)					Flange opening (Ø) mm	Net weight (kg)	Gross weight (kg)
			A	B	C	D	E			
50	843070	1/2"	906	338	435	370	83	78	14.8	17.5
75	853099	1/2"	1203	338	700	370	83	78	18.9	22.7

